arXiv:1104.4702v2 [cs.IT] 30 Apr 2011

Sum Rate Maximized Resource Allocation in Multiple DF Relays Aided OFDM Transmission

Tao Wang and Luc Vandendorpe, *Fellow, IEEE*

***Abstract*—In relay-aided wireless transmission systems, one of the key issues is how to manage the energy resource at the source and each individual relay, to optimize a certain performance metric. This paper addresses the sum rate maximized resource allocation (RA) problem in an orthogonal frequency division modulation (OFDM) transmission system assisted by multiple decode-and-forward (DF) relays, subject to the individual sum power constraints of the source and the relays. In particular, the transmission at each subcarrier can be in either the direct mode without any relay assisting, or the relay-aided mode with one or several relays assisting. We propose two RA algorithms which optimize the assignment of transmission mode and source power for every subcarrier, as well as the assisting relays and the power allocation to them for every relay-aided subcarrier. First, it is shown that the considered RA problem has zero Lagrangian duality gap when there is a big number of subcarriers. In this case, a duality based algorithm that finds a globally optimum RA is developed. Most interestingly, the sensitivity analysis in convex optimization theory is used to derive a closed-form optimum solution to a related convex optimization problem, for which the method based on the Karush-Kuhn-Tucker (KKT) conditions is not applicable. Second, a coordinate-ascent based iterative algorithm, which finds a suboptimum RA but is always applicable regardless of the duality gap of the RA problem, is developed. The effectiveness of these algorithms has been illustrated by numerical experiments.**

***Index Terms*—Orthogonal frequency division modulation, resource allocation, decode and forward, relaying, Lagrangian duality gap, dual decomposition method, energy efficiency.**

I. INTRODUCTION

Relay-aided cooperative transmission finds plenty of promising applications when it is difficult to install multiple antennas at the same radio equipment, and therefore has been attracting intensive research interest in both academia and industry lately [1]. Low complexity yet efficient protocols, such as amplify and forward (AF) as well as decode and forward (DF), have been proposed to simplify the implementation with practical devices [2], [3]. Typically, both protocols propose to carry out a relay-aided transmission within two time slots, namely a broadcasting slot and a relaying slot. In [3], the AF/DF which fixes every transmission in the relay-aided mode independently of source-relay channel conditions is referred to as fixed relaying AF/DF. In fact, improved protocols may be built for better performance. For instance, selection relaying AF/DF, which selects either the direct or relay-aided transmission mode depending on channel conditions, has been proposed to improve spectral efficiency [3]. In particular, the direct mode, which refers to the direct source to destination transmission without any relay assisting, is used when the source-destination channel gain is higher than the source-relay channel gain. Most interestingly, not fixed but selection relaying DF can achieve full diversity [3].

We consider in this paper a point to point orthogonal frequency division modulation (OFDM) transmission system aided by multiple DF relays. The motivation behind this is that the OFDM transmission has been widely recognized for current and future wireless systems, thanks to its flexibility to incorporate dynamic resource allocation (RA) for performance improvement [4]. In such a transmission system, one of the key issues is how to decide for every subcarrier the transmission mode and assisting relays if the relay-aided mode is chosen, and the power of the source and every individual relay, to maximize a certain objective related to system performance. Obviously, this RA problem is more complicated compared to those for conventional OFDM systems without relays. Therefore, RA algorithms are solicited for relay-aided OFDM systems.

To date, some related research works have been reported. To name a few, RA algorithms have been proposed in [5]–[8] for OFDM systems aided by AF relays, and in [9]–[14] for multi-user OFDM systems aided by DF relays. As for OFDM systems aided by DF relays, RA algorithms have been proposed in [15] to minimize sum power under rate constraints, and in [16], [17] to maximize sum rate subject to power constraints, when a single relay exists. However, at a subcarrier in the direct mode the source is idle during the relaying slot, which wastes spectrum resource. To address this issue, rate-optimized RA algorithms, which allow for the source to destination transmission during the two slots at the subcarrier in the direct mode, have been proposed in [18]–[21].

So far, the majority of proposed RA algorithms, as the aforementioned ones, restrict that at most one relay can assist the source at every relay-aided subcarrier. In fact, when there are multiple relays available, allowing not just one, but *each* of them to be eligible for assisting can exploit all degrees of freedom in the system to improve performance. For illustration purposes, example patterns of selecting single or multiple assisting relays are shown in Figure 1. For example, it has been shown in [22] that the sum power can be reduced in a multi-user OFDM system if multiple DF relays assist the transmission at every relay-aided subcarrier.

In this paper, we address the sum rate maximized RA problem in an OFDM system aided by multiple DF relays subject

Manuscript was received on October 8, 2010, and revised on February 14, 2011. T. Wang and L. Vandendorpe are with ICTEAM Institute, Université Catholique de Louvain, 1348 Louvain-la-Neuve, Belgium (email: {tao.wang,luc.vandendorpe}@uclouvain.be).

The authors would like to thank the Walloon Region for funding the projects MIMOCOM, the ARC SCOOP and the FP7 Network NEWCOM++.

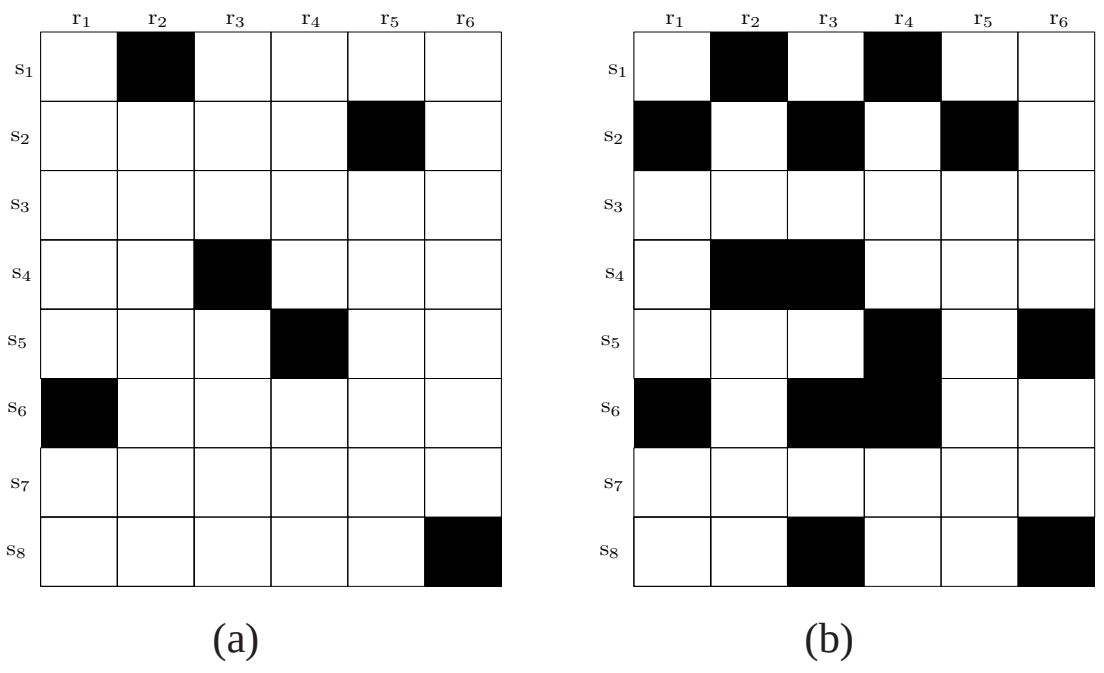

(a) (b)

Fig. 1. Example patterns of selecting (a) one relay or (b) multiple relays assisting at each relay-aided subcarrier, where a black block at the i-th row and j-th column indicates the j-th relay r_j assists the transmission at the i-th subcarrier s_i.

to the individual (per device, i.e. a source or a relay) sum (over all subcarriers) power constraints[1] of the source and the relays. In particular, one or several relays may cooperate with the source to transmit at every relay-aided subcarrier. When the sum power consumed by the source and that by every relay are fixed, the optimum RA to this problem leads to the maximum energy efficiency for the system under consideration, because the total energy consumed by the source and the relays for transmitting per information bit is minimized. Specifically, our contributions lie in the following aspects:

- when a big number of subcarriers is used, it is shown that the duality gap of the RA problem is equal to zero, based on the same idea first proposed in [23]. Assuming the number of subcarriers is sufficiently large, we develop a duality based algorithm which finds a globally optimum RA for the considered problem. Most interestingly, the *sensitivity analysis* in convex optimization theory is used to derive a *closed-form* optimum solution to a related convex optimization problem, for which the method based on the Karush-Kuhn-Tucker (KKT) conditions is not applicable.
- we develop a coordinate-ascent based iterative algorithm, which finds a suboptimum RA but is always applicable regardless of the duality gap of the RA problem. Specifically, this algorithm produces a successive set of RAs with nondecreasing sum rate until convergence.

The remainder of this paper is organized as follows. In the next section, the OFDM system under consideration is described and the RA problem is formulated. Then, the duality based algorithm and the iterative algorithm are developed in Sections III and IV, respectively. In Section V, the effectiveness of the proposed algorithms is illustrated by numerical experiments. Finally, some conclusions wrap up this paper in Section VI.

II. SYSTEM DESCRIPTION AND RA PROBLEM FORMULATION

A. System description

We consider the OFDM transmission from a source to a destination aided by N DF relays collected in the set $\Psi = \{\mathrm{r}_i | i = 1, \cdots, N\}$. All links are assumed to be frequency selective, and OFDM with properly designed cyclic prefix is used to transform every link into K parallel channels, each at a different subcarrier facing flat fading. At every subcarrier, the transmission of a symbol is in either the direct mode, or the relay-aided mode spanning across two equal-duration time slots, namely the broadcasting slot and the relaying slot. We assume the destination decodes the signal samples received at each subcarrier separately from those received at any other subcarrier.

TABLE I
CHANNEL COEFFICIENT AT SUBCARRIER k BETWEEN ANY TWO OF THE SOURCE, r_i, AND THE DESTINATION.

source to destination	source to r_i	r_i to destination
$h_{\mathrm{s,d}}(k)$	$h_{\mathrm{s,r}_i}(k)$	$h_{\mathrm{r}_i,\mathrm{d}}(k)$

We make the following assumptions about the RA in the system. First, the RA is determined by an algorithm running at a central controller, which knows precisely the noise power at each node, as well as the channel coefficients at every subcarrier from the source to every r_i, from the source to the destination, and from every r_i to the destination, respectively. Second, all channels remain unchanged within a sufficiently long duration, over which RA can be carried out accordingly. Third, the RA information can be reliably disseminated to the source, every relay, and the destination.

Let's consider the transmission of a unit-variance symbol θ at subcarrier k. The coefficient of the channel between any two of the source, r_i, and the destination, are notated according to Table I. We first describe the transmission in the relay-aided mode. The source first emits in the broadcasting slot the symbol $\sqrt{P_s P_{\mathrm{s},k}}\theta$ as illustrated in Figure 2.a, where P_s and $P_{\mathrm{s},k}$ represent the source sum power and the fraction of that sum power allocated to the transmission at subcarrier k, respectively. At the end of this slot, both the destination and the relays receive the source signal. The signal samples received at the destination and r_i can be expressed respectively by

$$y_k = \sqrt{P_s P_{\mathrm{s},k}} h_{\mathrm{s,d}}(k)\theta + n_k \tag{1}$$

and

$$y_{\mathrm{r}_i,k} = \sqrt{P_s P_{\mathrm{s},k}} h_{\mathrm{s,r}_i}(k)\theta + n_{\mathrm{r}_i,k}, \tag{2}$$

where n_k and $n_{\mathrm{r}_i,k}$ represent the corruption of the additive white Gaussian noise (AWGN) at the destination and r_i, respectively. We assume $\forall\, i$, $n_{\mathrm{r}_i,k}$ is a zero-mean circularly Gaussian random variable with the variance σ^2. The signal to noise ratio (SNR) at r_i can be computed as $P_{\mathrm{s},k} G_{\mathrm{s,r}_i}(k)$, where $G_{\mathrm{s,r}_i}(k) = \frac{P_s |h_{\mathrm{s,r}_i}(k)|^2}{\sigma^2}$ represents the normalized channel power gain from the source to r_i.

For subcarrier k, we define Ψ_k as the set containing all relays sorted in the increasing order of $G_{\mathrm{s,r}_i}(k)$, $\mathrm{r}_i(k)$ as the i-th relay in Ψ_k, and $\Psi_k(i)$ as the set containing relays in Ψ_k with indices from i to N. We assume the r_i that has the minimum $G_{\mathrm{s,r}_i}(k)$ among all assisting relays for subcarrier k is $\mathrm{r}_{b_k}(k)$ where b_k represents the index of that r_i in Ψ_k, and all r_i's in $\Psi_k(b_k)$ decode the received samples to recover θ.

---

[1] In this paper, the word "individual" will mean per device and "sum" will refer to a summation over all subcarriers, unless otherwise stated.

After the recovery of θ, all relays in $\Psi_k(b_k)$ transmit simultaneously to the destination in the relaying slot, which in effect establishes a distributed multiple input and single output (MISO) transmission link as illustrated in Figure 2.b. Specifically, $\mathrm{r}_i \in \Psi_k(b_k)$ transmits $w_{\mathrm{r}_i}\theta$, where w_{r_i} is the complex weight for transmit beamforming and satisfies $|w_{\mathrm{r}_i}|^2 = P_{\mathrm{r}_i}P_{\mathrm{r}_i,k}$. P_{r_i} and $P_{\mathrm{r}_i,k}$ represent the sum power of r_i and the fraction of that sum power allocated to subcarrier k, respectively. To have the relays' signals add coherently when received at the destination, $w_{\mathrm{r}_i} = \sqrt{P_{\mathrm{r}_i}P_{\mathrm{r}_i,k}}e^{-j\arg(h_{\mathrm{r}_i,\mathrm{d}}(k))}$ is used, where $\arg(h_{\mathrm{r}_i,\mathrm{d}}(k))$ stands for the phase of $h_{\mathrm{r}_i,\mathrm{d}}(k)$. It should be noted that this transmission protocol enables a flexible use of all relays opportunistically through a general form of *adaptive* transmit beamforming, in that b_k and $\{P_{\mathrm{r}_i,k}|\mathrm{r}_i \in \Psi_k(b_k)\}$ are determined by the RA algorithm depending on channel state information, as will be developed later. At the end of the relaying slot, the signal sample received at the destination is denoted by

$$z_k = \sum_{\mathrm{r}_i \in \Psi_k(b_k)} \sqrt{P_{\mathrm{r}_i}P_{\mathrm{r}_i,k}}|h_{\mathrm{r}_i,\mathrm{d}}(k)|\theta + v_k, \tag{3}$$

where v_k represents the AWGN corruption at the destination. We assume n_k and v_k are independent zero-mean circularly Gaussian random variables with the same variance σ^2.

Finally, y_k and z_k are processed at the destination. From (1) and (3), it can be seen that the relay-aided transmission at subcarrier k is in effect over a channel with a single input and two outputs. To achieve the capacity of this channel, the maximum ratio combining (MRC) should be used, i.e., the destination combines y_k and z_k to construct a decision variable

$$\begin{aligned} c_k = &\sqrt{P_s P_{\mathrm{s},k}}(h_{\mathrm{s,d}}(k))^* y_k + \\ &\Big(\sum_{\mathrm{r}_i \in \Psi_k(b_k)} \sqrt{P_{\mathrm{r}_i}P_{\mathrm{r}_i,k}}|h_{\mathrm{r}_i,\mathrm{d}}(k)|\Big)^* z_k, \end{aligned} \tag{4}$$

which is then decoded (please refer to page 179 of [24] for more details). After mathematical arrangements, the SNR for decoding c_k is derived as

$$\eta_k = P_{\mathrm{s},k}G_{\mathrm{s,d}}(k) + \left(\sum_{\mathrm{r}_i \in \Psi_k(b_k)} \sqrt{P_{\mathrm{r}_i,k}G_{\mathrm{r}_i,\mathrm{d}}(k)}\right)^2 \tag{5}$$

where $G_{\mathrm{s,d}}(k) = \frac{P_s|h_{\mathrm{s,d}}(k)|^2}{\sigma^2}$ and $G_{\mathrm{r}_i,\mathrm{d}}(k) = \frac{P_{\mathrm{r}_i}|h_{\mathrm{r}_i,\mathrm{d}}(k)|^2}{\sigma^2}$ represent the normalized channel power gains from the source to the destination and from r_i to the destination, respectively.

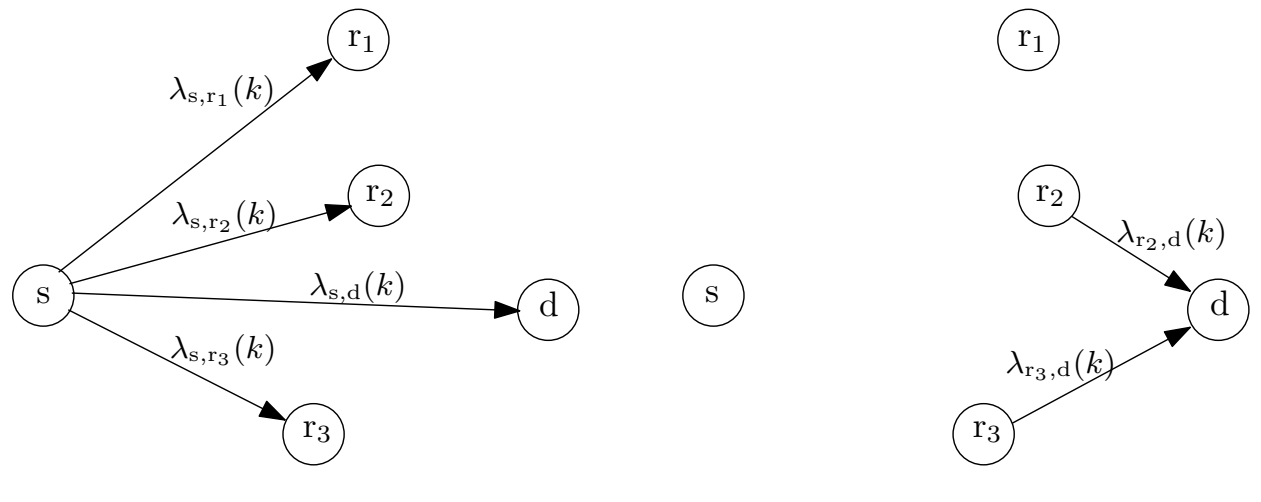
r1
$\lambda_{\mathrm{s},\mathrm{r}_1}(k)$
r2
$\lambda_{\mathrm{s},\mathrm{r}_2}(k)$
s
$\lambda_{\mathrm{s,d}}(k)$
d
$\lambda_{\mathrm{s},\mathrm{r}_3}(k)$
r3
r1
r2
$\lambda_{\mathrm{r}_2,\mathrm{d}}(k)$
s
d
$\lambda_{\mathrm{r}_3,\mathrm{d}}(k)$
r3

(a) In the broadcasting slot (b) In the relaying slot

Fig. 2. Illustration of a relay-aided transmission where r_2 and r_3 assist relaying at subcarrier k.

To ensure the reliable recovery of θ at every relay in $\Psi_k(b_k)$, the source transmission rate at subcarrier k should not be higher than $\log_2(1 + P_{\mathrm{s},k}G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k))$ bits/two-slots (bpts). Moreover, the source transmission rate should not be higher than $\log_2(1 + \eta_k)$ bpts to ensure reliable decoding of c_k at the destination. Therefore, the source transmission rate at subcarrier k in the relay-aided mode should be [3]

$$\begin{aligned} R_{k,1} &= \min\big(\log_2(1 + P_{\mathrm{s},k}G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)), \log_2(1+\eta_k)\big) \\ &= \log_2\big(1 + \min(\eta_k,\, P_{\mathrm{s},k}G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k))\big) \quad \text{bpts.} \end{aligned} \tag{6}$$

When b_k is fixed, $R_{k,1}$ is a concave function of $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k}|\forall\, \mathrm{r}_i \in \Psi\}$ due to the following reasons. First, η_k and $P_{\mathrm{s},k}G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)$ are both concave functions of $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k}|\forall\, \mathrm{r}_i \in \Psi\}$, and therefore $\min\{\eta_k,\, P_{\mathrm{s},k}G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)\}$ is a concave function of $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k}|\forall\, \mathrm{r}_i \in \Psi\}$, because the minimum of two concave functions is still a concave function. Second, $\log_2(1 + x)$ is an increasing and concave function of x. Therefore, $R_{k,1}$, as the composition of $\log_2(1 + x)$ and $x = \min\{\eta_k,\, P_{\mathrm{s},k}G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)\}$, is a concave function of $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k}|\forall\, \mathrm{r}_i \in \Psi\}$ when b_k is fixed, because the composition of an increasing concave function and a concave function is still a concave function [25].

As for the direct transmission mode at subcarrier k, we consider a more efficient protocol compared to restricting the source to transmit only in the broadcasting slot as in the related works [3], [15]–[17]. Specifically, the source emits two independent symbols in the two slots, respectively, and only the destination decodes the corresponding two received signal samples. We assume the AWGN corruptions for the two received samples are independent zero-mean circularly Gaussian distributed with variance σ^2, and the source uses the power $P_s P_{\mathrm{s},k}$ in total to transmit the two symbols. The maximum source transmission rate at subcarrier k in the direct mode can be derived as

$$R_{k,2} = 2\log_2\left(1 + P_{\mathrm{s},k}\frac{G_{\mathrm{s,d}}(k)}{2}\right) \quad \text{bpts,} \tag{7}$$

and it is achieved when the source uses the power $\frac{P_s P_{\mathrm{s},k}}{2}$ to transmit each symbol.

Note that we assume the same subcarrier is used by the source and the relays for transmitting a symbol in the relay-aided mode. In fact, optimized subcarrier pairing could also be implemented, which would further increase the degrees of freedom for optimization [16]. However, it would be more difficult to solve the RA problem, and that is why in the current work, the RA algorithms are designed under the assumption of nonoptimized subcarrier pairing. We will nevertheless use the insights gained here to guide future work, which will also consider subcarrier pairing.

B. Formulation of the RA problem

We consider the RA problem to maximize the sum rate, by optimizing the transmission mode and source power allocation for each subcarrier, as well as assisting relays and power allocation to them for every relay-aided subcarrier. To formulate this RA problem, we define a binary variable t_k which indicates the transmission at subcarrier k is in the relay-aided mode (resp. the direct mode) if $t_k = 1$ (resp. $t_k = 0$). Mathematically, the RA problem is formulated as

$$\begin{aligned} \max \quad & \sum_{k=1}^{K} \big(t_k R_{k,1} + (1-t_k) R_{k,2}\big) \\ \text{s.t.} \quad & \sum_{k=1}^{K} P_{\mathrm{s},k} \leq 1, \qquad \sum_{k=1}^{K} P_{\mathrm{r}_i,k} \leq 1, \forall\, \mathrm{r}_i \in \Psi, \\ & P_{\mathrm{s},k} \geq 0, \forall\, k, \qquad P_{\mathrm{r}_i,k} \geq 0, \forall\, k, \forall\, \mathrm{r}_i \in \Psi, \\ & t_k \in \{0,1\}, \forall\, k, \quad b_k \in \{1, \cdots, N\}, \forall k, \end{aligned} \tag{8}$$

where $\{t_k, b_k, P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$ are to be optimized by the RA algorithm.

To facilitate analysis in the following sections, (8) can be formulated into the following equivalent form

$$\begin{aligned} \max_{\mathbf{x}} \quad & f(\mathbf{x}) \\ \text{s.t.} \quad & \mathbf{x} \in \mathcal{D}_{\mathbf{x}}, \\ & g(\mathbf{x}) \preccurlyeq \mathbf{1}, \end{aligned} \tag{9}$$

where $\mathbf{x}$ represents the vector stacking all optimization variables, $\mathcal{D}_{\mathbf{x}}$ stands for the definition domain of $\mathbf{x}$, $f(\mathbf{x})$ denotes the sum rate, $g(\mathbf{x}) = [g_1(\mathbf{x}), \cdots, g_{N+1}(\mathbf{x})]^T$ where $g_1(\mathbf{x}) = \sum_{k=1}^{K} P_{\mathrm{s},k}$ and $g_{i+1}(\mathbf{x}) = \sum_{k=1}^{K} P_{\mathrm{r}_i,k}$ $(i = 1, \cdots, N)$ stacks the sum power of the source and those of the relays, $\mathbf{1}$ represents an $(N+1) \times 1$ vector with every entry equal to 1, and $\preccurlyeq$ denotes the entrywise "smaller than" inequality.

III. The duality based RA algorithm

The Lagrangian for (9) is defined as

$$L(\mathbf{x}, \boldsymbol{\mu}) = f(\mathbf{x}) + \boldsymbol{\mu}^T \big(\mathbf{1} - g(\mathbf{x})\big), \tag{10}$$

where $\boldsymbol{\mu} = [\mu_{\mathrm{s}}, \mu_{\mathrm{r}_1}, \cdots, \mu_{\mathrm{r}_N}]^T$, with μ_{s} and μ_{r_i} representing the dual variables related to the sum power constraints of the source and r_i, respectively. The dual function is defined as $d(\boldsymbol{\mu}) = \max_{\mathbf{x} \in \mathcal{D}_{\mathbf{x}}} L(\mathbf{x}, \boldsymbol{\mu})$, and we denote a $\mathbf{x}$ that maximizes $L(\mathbf{x}, \boldsymbol{\mu})$ as $\mathbf{x}_{\boldsymbol{\mu}}$. If there exist multiple $\mathbf{x}$'s that maximize $L(\mathbf{x}, \boldsymbol{\mu})$, $d(\boldsymbol{\mu})$ is not differentiable at $\boldsymbol{\mu}$, and a subgradient of $d(\boldsymbol{\mu})$ at $\boldsymbol{\mu}$ is equal to $\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}})$, where any $\mathbf{x}$ that maximizes $L(\mathbf{x}, \boldsymbol{\mu})$ can be chosen as $\mathbf{x}_{\boldsymbol{\mu}}$ [26].

It is important to note that the optimum objective value of (9), denoted by $f^\star$, always satisfies $f^\star \leq d(\boldsymbol{\mu})$ for any $\boldsymbol{\mu} \succcurlyeq \mathbf{0}$, where $\mathbf{0}$ represents an $(N+1) \times 1$ vector with every entry equal to 0, and $\succcurlyeq$ denotes the entrywise "greater than" inequality [25]. The duality gap is defined as $\min_{\boldsymbol{\mu}: \boldsymbol{\mu} \succcurlyeq \mathbf{0}} d(\boldsymbol{\mu}) - f^\star$. Note that $\mathcal{D}_{\mathbf{x}}$ is not a convex set, and therefore the duality gap of (9) might not be zero since the Slater constraint qualification is not satisfied [26]. Interestingly, it is shown in Appendix A based on the same idea proposed in [23] that, when K is sufficiently large (9) has zero duality gap.

Assuming sufficiently large K, a duality based RA algorithm will be developed in this section to find a globally optimum solution to (9). This algorithm relies on finding the optimum dual variable $\boldsymbol{\mu}^\star$ that minimizes $d(\boldsymbol{\mu})$ based on the subgradient method, i.e., updating $\boldsymbol{\mu}$ with $\boldsymbol{\mu} = [\boldsymbol{\mu} - \delta_q (\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}}))]^+$, where $[\boldsymbol{\mu}]^+$ represents a vector built from $\boldsymbol{\mu}$ by only raising its negative entries to zero, and δ_q represents the step size used in the q-th iteration, until $g(\mathbf{x}_{\boldsymbol{\mu}}) \preccurlyeq \mathbf{1}$ and $\boldsymbol{\mu}^T (\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}})) = 0$ are fulfilled. Then, $\mathbf{x}_{\boldsymbol{\mu}^\star}$ is a globally optimum solution to (9) as explained in Appendix A. If δ_q satisfies the diminishing conditions (i.e. $\lim_{q \to +\infty} \delta_q \to 0$ and $\sum_{q=1}^{+\infty} \delta_q = \infty$), $\boldsymbol{\mu}$ approaches $\boldsymbol{\mu}^\star$ as q increases [26].

In practice, it may take an unaffordably large number of iterations before these optimality conditions are satisfied. To address this issue, the iteration can be terminated when $g(\mathbf{x}_{\boldsymbol{\mu}}) \preccurlyeq \mathbf{1}$ and $\boldsymbol{\mu}^T (\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}})) < \epsilon$, where ϵ is a prescribed small positive value. In this case, $f(\mathbf{x}_{\boldsymbol{\mu}}) \geq f^\star - \epsilon$ follows because of

$$\begin{aligned} f^\star - f(\mathbf{x}_{\boldsymbol{\mu}}) &\leq d(\boldsymbol{\mu}) - f(\mathbf{x}_{\boldsymbol{\mu}}) \\ &= \boldsymbol{\mu}^T (\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}})) < \epsilon, \end{aligned}$$

which means that $\mathbf{x}_{\boldsymbol{\mu}}$ is a good approximation of a globally optimum solution to (9).

The overall duality based RA algorithm is summarized in **Algorithm 1**. Specifically, $\boldsymbol{\mu}$ is initialized with $\mathbf{1}$ at the beginning, and $\mathbf{x}_{\boldsymbol{\mu}}$ is found as the optimum solution to the Lagrangian maximization problem

$$\begin{aligned} \max_{\mathbf{x}} \quad & L(\mathbf{x}, \boldsymbol{\mu}) = \sum_{k=1}^{K} \big(t_k R_{k,1} + (1-t_k) R_{k,2}\big) + \\ & \qquad \mu_{\mathrm{s}} \big(1 - \sum_{k=1}^{K} P_{\mathrm{s},k}\big) + \sum_{i=1}^{N} \mu_{\mathrm{r}_i} \big(1 - \sum_{k=1}^{K} P_{\mathrm{r}_i,k}\big), \\ \text{s.t.} \quad & P_{\mathrm{s},k} \geq 0, \forall\, k, \qquad P_{\mathrm{r}_i,k} \geq 0, \forall\, k, \forall\, \mathrm{r}_i \in \Psi, \\ & t_k \in \{0,1\}, \forall\, k, \quad b_k \in \{1, \cdots, N\}, \forall k, \end{aligned} \tag{11}$$

with **Algorithm 2** developed in Section III-A. Furthermore, we choose $\delta_q = \frac{1+Q_1}{q+Q_1}$ (Q_1 is a prescribed positive integer) which satisfies the aforementioned diminishing conditions.

Algorithm 1 The duality based RA algorithm

```
$q = 1$, $\boldsymbol{\mu} = \mathbf{1}$; {$\mathbf{1}$ is a vector with every entry equal to 1}
repeat
    $\boldsymbol{\mu} = [\boldsymbol{\mu} - \frac{1+Q_1}{q+Q_1} (\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}}))]^+$
    $q = q + 1$;
    Find $\mathbf{x}_{\boldsymbol{\mu}}$ with Algorithm 2;
until $g(\mathbf{x}_{\boldsymbol{\mu}}) \preccurlyeq \mathbf{1}$ and $\boldsymbol{\mu}^T (\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}})) < \epsilon$
$\mathbf{x}_{\boldsymbol{\mu}}$ produced at last is output as an optimum solution to (9).
```

A. Algorithm to solve the Lagrangian maximization problem

We can see that the optimum solution to (11) can be found on a per subcarrier basis, i.e., $\{t_k(\boldsymbol{\mu}), b_k(\boldsymbol{\mu}), P_{\mathrm{s},k}(\boldsymbol{\mu}), P_{\mathrm{r}_i,k}(\boldsymbol{\mu}) | \forall\, \mathrm{r}_i \in \Psi\}$ representing the $\{t_k, b_k, P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi\}$ contained in $\mathbf{x}_{\boldsymbol{\mu}}$ for subcarrier k, can be found as an optimum solution to

$$\begin{aligned} \max \quad & L_k = t_k R_{k,1} + (1-t_k) R_{k,2} - \mu_{\mathrm{s}} P_{\mathrm{s},k} - \sum_{i=1}^{N} \mu_{\mathrm{r}_i} P_{\mathrm{r}_i,k} \\ \text{s.t.} \quad & P_{\mathrm{s},k} \geq 0, \qquad\qquad P_{\mathrm{r}_i,k} \geq 0, \forall\, \mathrm{r}_i \in \Psi, \\ & b_k \in \{1, \cdots, N\}, \quad t_k \in \{0,1\}. \end{aligned} \tag{12}$$

When t_k and b_k are fixed, (12) is reduced to a convex optimization problem. When $t_k = 0$, the maximum

L_k is not influenced by b_k, while this not the case when $t_k = 1$ and b_k is fixed. Based on the above analysis, an exhaustive-search based algorithm is designed to solve (12). To facilitate algorithm design, let's denote the maximum L_k when $t_k = 0$ by $L_{k,0}$, the maximum L_k and the optimum $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi\}$ when $t_k = 1$ and b_k is fixed by $L_{k,1}(b_k)$ and $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$, respectively. Note that $L_{k,1}(b_k)$ and $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$ can be evaluated with **Algorithm 3** developed in Section III.B.

It is important to note that $L_{k,1}(b_k) \leq L_{k,0}$ if $G_{\mathrm{s,r}_{b_k}(k)}(k) \leq G_{\mathrm{s,d}}(k)$, because of

$$\begin{aligned} L_{k,1}(b_k) &= \log_2(1 + \min(\eta'_k, P_{\mathrm{s},k}(b_k) G_{\mathrm{s,r}_{b_k}(k)}(k))) + X_{b_k} \\ &\leq \log_2(1 + P_{\mathrm{s},k}(b_k) G_{\mathrm{s,d}}(k)) + X_{b_k} \qquad (13) \\ &\leq 2\log_2\left(1 + P_{\mathrm{s},k}(b_k)\frac{G_{\mathrm{s,d}}(k)}{2}\right) + X_{b_k} \\ &\leq L_{k,0}, \end{aligned}$$

where $X_{b_k} = -\mu_{\mathrm{s}} P_{\mathrm{s},k}(b_k) - \sum_{i=1}^{N} \mu_{\mathrm{r}_i} P_{\mathrm{r}_i,k}(b_k)$, and η'_k represents the η_k corresponding to $\Psi_k(b_k)$ and $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$.

Algorithm 2 Algorithm to solve (11) when $\boldsymbol{\mu}$ is fixed

```
for $k = 1$ to $K$ do
  if $G_{\mathrm{s,d}}(k) \geq \max_{\mathrm{r}_i \in \Psi} G_{\mathrm{r}_i,\mathrm{d}}(k)$ then
    $t_k(\boldsymbol{\mu}) = 0$;
    $P_{\mathrm{s},k}(\boldsymbol{\mu})$ and $P_{\mathrm{r}_i,k}(\boldsymbol{\mu}), \forall\, \mathrm{r}_i \in \Psi$ are evaluated by (14) and (15), respectively;
  else
    Compute $L_{k,0}$ with (16);
    Find $i_k$ as the minimum $i$ satisfying $G_{\mathrm{s,r}_{i(k)}}(k) > G_{\mathrm{s,d}}(k)$;

    for $b_k = i_k$ to $N$ do
      Find $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$ with Algorithm 3 when $t_k = 1$ and $b_k$ is fixed, then compute the $L_{k,1}(b_k)$;
    end for
    if $L_{k,0} \geq \max_{b_k \in \mathcal{B}_k} L_{k,1}(b_k)$ then
      $t_k(\boldsymbol{\mu}) = 0$;
      $P_{\mathrm{s},k}(\boldsymbol{\mu})$ and $P_{\mathrm{r}_i,k}(\boldsymbol{\mu}), \forall\, \mathrm{r}_i \in \Psi$ are evaluated by (14) and (15), respectively;
    else
      $t_k(\boldsymbol{\mu}) = 1$;
      $b_k(\boldsymbol{\mu}) = \arg\max_{b_k \in \mathcal{B}_k} L_{k,1}(b_k)$;
      $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$ when $b_k = b_k(\boldsymbol{\mu})$ is assigned to $\{P_{\mathrm{s},k}(\boldsymbol{\mu}), P_{\mathrm{r}_i,k}(\boldsymbol{\mu}) | \forall\, \mathrm{r}_i \in \Psi\}$.
    end if
  end if
end for
```

Based on the above analysis, $t_k(\boldsymbol{\mu})$, $b_k(\boldsymbol{\mu})$, $P_{\mathrm{s},k}(\boldsymbol{\mu})$, and $\{P_{\mathrm{r}_i,k}(\boldsymbol{\mu}) | \forall\, \mathrm{r}_i \in \Psi\}$ can be found with one of the following procedures:

1) when $\max_{\mathrm{r}_i} G_{\mathrm{s,r}_i}(k) \leq G_{\mathrm{s,d}}(k)$, $t_k(\boldsymbol{\mu}) = 0$, because $L_{k,0} \geq L_{k,1}(b_k)$ holds for every feasible value of b_k according to (13). In this case, it can be derived according to the KKT conditions that

$$P_{\mathrm{s},k}(\boldsymbol{\mu}) = 2\left[\frac{\log_2(e)}{\mu_{\mathrm{s}}} - \frac{1}{G_{\mathrm{s,d}}(k)}\right]^{+}, \qquad (14)$$

$$P_{\mathrm{r}_i,k}(\boldsymbol{\mu}) = 0, \forall\, \mathrm{r}_i \in \Psi, \qquad (15)$$

$$L_{k,0} = 2\log_2\left(1 + G_{\mathrm{s,d}}(k)\left[\frac{\log_2(e)}{\mu_{\mathrm{s}}} - \frac{1}{G_{\mathrm{s,d}}(k)}\right]^{+}\right) \qquad (16)$$

2) when $\max_{\mathrm{r}_i} G_{\mathrm{s,r}_i}(k) > G_{\mathrm{s,d}}(k)$, $t_k(\boldsymbol{\mu})$ can be determined by an exhaustive-search based method, i.e., if $\max_{b_k \in \{1,\cdots,N\}} L_{k,1}(b_k) > L_{k,0}$, $t_k(\boldsymbol{\mu}) = 1$, otherwise $t_k(\boldsymbol{\mu}) = 0$. Let's denote i_k as the minimum i satisfying $G_{\mathrm{s,r}_i(k)}(k) > G_{\mathrm{s,d}}(k)$. Note that when $1 \leq b_k \leq i_k - 1$, $G_{\mathrm{s,r}_{b_k}(k)}(k) \leq G_{\mathrm{s,d}}(k)$, hence $L_{k,1}(b_k) \leq L_{k,0}$ holds for sure according to (13). This means that the comparison of $L_{k,0}$ with $\max_{b_k \in \{1,\cdots,N\}} L_{k,1}(b_k)$ is equivalent to comparing $L_{k,0}$ with $\max_{b_k \in \mathcal{B}_k} L_{k,1}(b_k)$ where $\mathcal{B}_k = \{i_k, \cdots, N\}$. Based on this idea, $L_{k,0}$ is evaluated with (16), and $L_{k,1}(b_k)$ is computed for all values of $b_k \in \mathcal{B}_k$ with **Algorithm 3**. If $L_{k,0} > \max_{b_k \in \mathcal{B}_k} L_{k,1}(b_k)$, $t_k(\boldsymbol{\mu}) = 0$, and $P_{\mathrm{s},k}(\boldsymbol{\mu})$ and $\{P_{\mathrm{r}_i,k}(\boldsymbol{\mu}) | \forall\, \mathrm{r}_i \in \Psi\}$ are computed with (14) and (15), respectively. Otherwise, $t_k(\boldsymbol{\mu}) = 1$, $b_k(\boldsymbol{\mu}) = \arg\max_{b_k \in \mathcal{B}_k} L_{k,1}(b_k)$, and the $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$ when $b_k = b_k(\boldsymbol{\mu})$ is taken as $\{P_{\mathrm{s},k}(\boldsymbol{\mu}), P_{\mathrm{r}_i,k}(\boldsymbol{\mu}) | \forall\, \mathrm{r}_i \in \Psi\}$.

In summary, the overall algorithm of finding $\mathbf{x}_{\boldsymbol{\mu}}$ is summarized in **Algorithm 2**. We will proceed with developing **Algorithm 3** to find $L_{k,1}(b_k)$ and $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$ in the next section.

B. Algorithm to solve (12) *when* $t_k = 1$ *and* b_k *is fixed*

When $t_k = 1$ and b_k has a fixed value in $\mathcal{B}_k$, (12) is equivalent to

$$\begin{aligned} \max\ L_k &= R_{k,1} - \mu_{\mathrm{s}} P_{\mathrm{s},k} - \sum_{i=1}^{N} \mu_{\mathrm{r}_i} P_{\mathrm{r}_i,k} \\ &= \log_2(1+\gamma_k) - \mu_{\mathrm{s}} P_{\mathrm{s},k} - \sum_{i=1}^{N} \mu_{\mathrm{r}_i} P_{\mathrm{r}_i,k} \\ \text{s.t.}\ & \gamma_k \leq P_{\mathrm{s},k} G_{\mathrm{s,r}_{b_k}(k)}(k), \qquad (17) \\ & \gamma_k \leq P_{\mathrm{s},k} G_{\mathrm{s,d}}(k) + \left(\sum_{\mathrm{r}_i \in \Psi_k(b_k)} \sqrt{P_{\mathrm{r}_i,k} G_{\mathrm{r}_i,\mathrm{d}}(k)}\right)^2, \\ & \gamma_k \geq 0, \\ & P_{\mathrm{r}_i,k} \geq 0, \forall\, \mathrm{r}_i \in \Psi, \end{aligned}$$

where γ_k is an intermediate optimization variable to guarantee the equivalence.

It can readily be shown that (17) is a convex optimization problem. To solve it, one may formulate a set of equations based on the KKT conditions and then solve them for $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$. *It is very important to note that this method is effective only when the objective function and all the constraint functions are differentiable at the optimum solution.* However, the second term in the right hand side of the second constraint in (17) is not differentiable at $P_{\mathrm{r}_i,k}=0, \forall\, \mathrm{r}_i \in \Psi_k(b_k)$. This means that if $\exists\, \mathrm{r}_i \in \Psi_k(b_k)$, $P_{\mathrm{r}_i,k}(b_k) = 0$, *which might happen as shown later*, the KKT conditions based method is not capable of finding that optimum solution.

To address this issue, we solve (17) based on the idea that $P_{\mathrm{s},k}(b_k)$ is the optimum solution to

$$\begin{aligned} \max\ & \log_2(1+\gamma_k) - \mu_{\mathrm{s}} P_{\mathrm{s},k} \\ \text{s.t.}\ & \gamma_k \le P_{\mathrm{s},k} G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k), \\ & \gamma_k \le P_{\mathrm{s},k} G_{\mathrm{s},\mathrm{d}}(k) + x, \\ & \gamma_k \ge 0, \end{aligned} \tag{18}$$

and $\{P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$ is the optimum solution to

$$\begin{aligned} \max\ & \sum_{i=1}^{N} (-\mu_{\mathrm{r}_i} P_{\mathrm{r}_i,k}) \\ \text{s.t.}\ & \sum_{\mathrm{r}_i \in \Psi_k(b_k)} \sqrt{P_{\mathrm{r}_i,k} G_{\mathrm{r}_i,\mathrm{d}}(k)} = \sqrt{x}, \\ & P_{\mathrm{r}_i,k} \ge 0, \forall\, \mathrm{r}_i \in \Psi, \end{aligned} \tag{19}$$

when $x = x_{\mathrm{o}}$ with

$$x_{\mathrm{o}} = \left(\sum_{\mathrm{r}_i \in \Psi_k(b_k)} \sqrt{P_{\mathrm{r}_i,k}(b_k) G_{\mathrm{r}_i,\mathrm{d}}(k)} \right)^2 .$$

Specifically, x_{o} is first determined, and then (18) and (19) with $x = x_{\mathrm{o}}$ are solved to compute $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$. At first glance, this method seems confronted with a chicken-and-egg dilemma: though $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$ can be computed by solving (18) and (19) once x_{o} is known, it seems that $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$ needs to be known first in order to compute x_{o}. In fact, this dilemma can be elegantly circumvented by using the *sensitivity analysis* in convex optimization theory to first determine x_{o} without knowing $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$, as elaborated in the following.

1) Solutions to (18) *and* (19) *given x:* Let's denote the optimum objective values of (18) and (19) by $f_1(x)$ and $f_2(x)$, respectively. Obviously, (18) is a convex optimization problem. Let's denote the optimum γ_k and the optimum dual variables associated with the first and second constraints of (18) by $\gamma_k(x)$, $\alpha_k(x)$, and $\beta_k(x)$, respectively. According to the KKT conditions of (18),

$$\mu_{\mathrm{s}} = G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)\alpha_k(x) + G_{\mathrm{s},\mathrm{d}}(k)\beta_k(x) \tag{20}$$

and

$$\gamma_k(x) = \left[\frac{\log_2 e}{\alpha_k(x) + \beta_k(x)} - 1 \right]^+ \tag{21}$$

should be satisfied.

As for (19), it can readily be derived that

- when $\forall\, \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} > 0$, $f_2(x) = -\frac{x}{\theta_{b_k}}$, and the optimum $P_{\mathrm{r}_i,k}$ to (19) is
$$P_{\mathrm{r}_i,k} = \begin{cases} 0 & \text{if } \mathrm{r}_i \notin \Psi_k(b_k), \\ \frac{G_{\mathrm{r}_i,\mathrm{d}}(k)}{(\mu_{\mathrm{r}_i}\theta_{b_k})^2} x & \text{if } \mathrm{r}_i \in \Psi_k(b_k), \end{cases} \tag{22}$$
where $\theta_{b_k} = \sum_{\mathrm{r}_i \in \Psi_k(b_k)} G_{\mathrm{r}_i,\mathrm{d}}(k)/\mu_{\mathrm{r}_i}$.
- when $\exists\, \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} = 0$, $f_2(x) = 0$, and the optimum $P_{\mathrm{r}_i,k}$ to (19) is equal to 0 if $\mathrm{r}_i \notin \Psi_k(b_k)$ or if $\mathrm{r}_i \in \Psi_k(b_k)$ with $\mu_{\mathrm{r}_i} > 0$. The optimum $\{P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi_k(b_k), \mu_{\mathrm{r}_i} = 0\}$ is any set of nonnegative values satisfying
$$\sum_{\mathrm{r}_i : \mathrm{r}_i \in \Psi_k(b_k), \mu_{\mathrm{r}_i}=0} \sqrt{P_{\mathrm{r}_i,k} G_{\mathrm{r}_i,\mathrm{d}}(k)} = \sqrt{x}. \tag{23}$$
Moreover, it can readily be shown based on the Schwartz inequality that, $\forall\ \mathrm{r}_i : \mathrm{r}_i \in \Psi_k(b_k)$ and $\mu_{\mathrm{r}_i} = 0$, the optimum $P_{\mathrm{r}_i,k}$ satisfying (23) and minimizing the sum power of relays is $P_{\mathrm{r}_i,k} = \frac{G_{\mathrm{r}_i,\mathrm{d}}(k) x^2}{(\sum_{\mathrm{r}_i : \mathrm{r}_i \in \Psi_k(b_k), \mu_{\mathrm{r}_i}=0} G_{\mathrm{r}_i,\mathrm{d}}(k))^2}$.

2) Finding x_{o} based on the sensitivity analysis: Let's denote the L_k in (17) computed with the optimum $\{\gamma_k, P_{\mathrm{s},k}\}$ to (18) and the optimum $\{P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi\}$ to (19) by $L_{k,1}(x, b_k)$ when $x \ge 0$. Obviously, $L_{k,1}(x, b_k) = f_1(x) + f_2(x)$ and $L_{k,1}(x, b_k) \le L_{k,1}(b_k)$, since $L_{k,1}(b_k)$ is defined in Section III.A as the maximum L_k for (17), while $L_{k,1}(x, b_k)$ is the L_k computed with the above mentioned $\{\gamma_k, P_{\mathrm{s},k}\}$ and $\{P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi\}$ which are feasible for (17). When $x = x_{\mathrm{o}}$, the $P_{\mathrm{s},k}$ and $\{P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi\}$ used for computing $L_{k,1}(x, b_k)$ are equal to $P_{\mathrm{s},k}(b_k)$ and $\{P_{\mathrm{r}_i,k}(b_k) | \forall\, \mathrm{r}_i \in \Psi\}$, respectively, and therefore $L_{k,1}(x_{\mathrm{o}}, b_k) = L_{k,1}(b_k)$. This means that $x_{\mathrm{o}} = \arg\max_{x : x \ge 0} L_{k,1}(x, b_k)$.

To determine x_{o}, let's consider $L'_{k,1}(x, b_k)$ which represents the first order derivative of $L_{k,1}(x, b_k)$ with respect to x. According to convex optimization theory, $\beta_k(x)$ represents the sensitivity of $f_1(x)$ with respect to x, i.e., $f'_1(x) = \beta_k(x)$ (please refer to pages 249-253 in [25] for more details). Therefore,

$$L'_{k,1}(x, b_k) = \begin{cases} \beta_k(x) - 1/\theta_{b_k} & \text{if } \forall\, \mathrm{r}_i \in \Psi_k(b_k), \mu_{\mathrm{r}_i} > 0, \\ \beta_k(x) & \text{if } \exists\, \mathrm{r}_i \in \Psi_k(b_k), \mu_{\mathrm{r}_i} = 0. \end{cases} \tag{24}$$

Based on the above analysis, the determination of x_{o}, $\beta_k(x_{\mathrm{o}})$, $\alpha_k(x_{\mathrm{o}})$ and $P_{\mathrm{s},k}(b_k)$ falls into one of the following cases:

- when $\forall\, \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} > 0$ and $\frac{\mu_{\mathrm{s}}}{G_{\mathrm{s},\mathrm{d}}(k)} \le \frac{1}{\theta_{b_k}}$, $x_{\mathrm{o}} = 0$. This is because $L_{k,1}(x, b_k)$ is a nonincreasing function of x since $\beta_k(x) \in [0, \mu_{\mathrm{s}}/G_{\mathrm{s},\mathrm{d}}(k)]$ and $L'_{k,1}(x, b_k) \le 0$ for any $x \ge 0$. In this case, the first constraint in (18) when $x = x_{\mathrm{o}}$ is relaxed, whereas the second one is saturated, since $G_{\mathrm{s},\mathrm{d}}(k) < G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)$. Therefore, $\alpha_k(x_{\mathrm{o}}) = 0$, $\beta_k(x_{\mathrm{o}}) = \frac{\mu_{\mathrm{s}}}{G_{\mathrm{s},\mathrm{d}}(k)}$, $\gamma_k(x_{\mathrm{o}}) = \left[\frac{G_{\mathrm{s},\mathrm{d}}(k)\log_2 e}{\mu_{\mathrm{s}}} - 1\right]^+$, and
$$P_{\mathrm{s},k}(b_k) = \frac{\gamma_k(x_{\mathrm{o}})}{G_{\mathrm{s},\mathrm{d}}(k)} = \left[\frac{\log_2 e}{\mu_{\mathrm{s}}} - \frac{1}{G_{\mathrm{s},\mathrm{d}}(k)} \right]^+ . \tag{25}$$
- when $\forall\ \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} > 0$ and $\frac{\mu_{\mathrm{s}}}{G_{\mathrm{s},\mathrm{d}}(k)} > \frac{1}{\theta_{b_k}}$, $\beta_k(x_{\mathrm{o}}) = \frac{1}{\theta_{b_k}}$ since $L'_{k,1}(x_{\mathrm{o}}, b_k) = 0$ should be satisfied. In this case, $\alpha_k(x_{\mathrm{o}}) = \frac{\mu_{\mathrm{s}} - G_{\mathrm{s},\mathrm{d}}(k)/\theta_{b_k}}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)} > 0$ because (20) is satisfied, and $\gamma_k(x_{\mathrm{o}})$ can be computed with (21). This means that both constraints in (18) when $x = x_{\mathrm{o}}$ are

saturated, and therefore

$$P_{\mathrm{s},k}(b_k) = \frac{\gamma_k(x_\mathrm{o})}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)} = \left[\frac{\log_2 e}{\mu_\mathrm{s} + \Delta_{b_k}/\theta_{b_k}} - \frac{1}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)}\right]^+, \tag{26}$$

and

$$x_\mathrm{o} = P_{\mathrm{s},k}(b_k)\Delta_{b_k} = \left[\frac{\log_2 e}{\mu_\mathrm{s}/\Delta_{b_k} + 1/\theta_{b_k}} - \frac{\Delta_{b_k}}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)}\right]^+, \tag{27}$$

where $\Delta_{b_k} = G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k) - G_{\mathrm{s},\mathrm{d}}(k)$.

- when $\exists\ \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} = 0$, $\beta_k(x_\mathrm{o}) = 0$ since $L'_{k,1}(x_\mathrm{o}, b_k) = 0$ should be satisfied. In this case, $\alpha_k(x_\mathrm{o}) = \frac{\mu_\mathrm{s}}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)}$, and $\gamma_k(x_\mathrm{o}) = \left[\frac{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)\log_2 e}{\mu_\mathrm{s}} - 1\right]^+$. This means that the first constraint in (18) when $x = x_\mathrm{o}$ is saturated, whereas the second one is relaxed. Therefore,

$$P_{\mathrm{s},k}(b_k) = \frac{\gamma_k(x_\mathrm{o})}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)} = \left[\frac{\log_2 e}{\mu_\mathrm{s}} - \frac{1}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)}\right]^+, \tag{28}$$

and x_o can be any value satisfying $x_\mathrm{o} \geq \gamma_k(x_\mathrm{o}) - P_{\mathrm{s},k}(b_k)G_{\mathrm{s},\mathrm{d}}(k) = x_\mathrm{th}$ where

$$x_\mathrm{th} = \Delta_{b_k}\left[\frac{\log_2 e}{\mu_\mathrm{s}} - \frac{1}{G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)}\right]^+. \tag{29}$$

Algorithm 3 Algorithm to solve (17) when $\boldsymbol{\mu}$ is fixed

```
if $\forall\ \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} > 0$ and $\frac{\mu_\mathrm{s}}{G_{\mathrm{s},\mathrm{d}}(k)} \leq \frac{1}{\theta_{b_k}}$ then
    $P_{\mathrm{s},k}(b_k)$ is evaluated by (25);
    $P_{\mathrm{r}_i,k}(b_k) = 0,\ \forall\ \mathrm{r}_i \in \Psi$;
else if $\forall\ \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} > 0$ and $\frac{\mu_\mathrm{s}}{G_{\mathrm{s},\mathrm{d}}(k)} > \frac{1}{\theta_{b_k}}$ then
    $P_{\mathrm{s},k}(b_k)$ is evaluated by (26);
    $\forall\ \mathrm{r}_i \notin \Psi_k(b_k)$, $P_{\mathrm{r}_i,k}(b_k) = 0$;
    $\forall\ \mathrm{r}_i \in \Psi_k(b_k)$, $P_{\mathrm{r}_i,k}(b_k)$ is evaluated by (22) with $x$ equal to $x_\mathrm{o}$ computed with (27);
else if $\exists\ \mathrm{r}_i \in \Psi_k(b_k)$, $\mu_{\mathrm{r}_i} = 0$ then
    $P_{\mathrm{s},k}(b_k)$ is evaluated by (28),
    $\forall\ \mathrm{r}_i \notin \Psi_k(b_k)$, $P_{\mathrm{r}_i,k}(b_k) = 0$;
    $\forall\ \mathrm{r}_i \in \Psi_k(b_k)$ with $\mu_{\mathrm{r}_i} > 0$, $P_{\mathrm{r}_i,k}(b_k) = 0$;
    $\forall\ \mathrm{r}_i \in \Psi_k(b_k)$ with $\mu_{\mathrm{r}_i} = 0$, $P_{\mathrm{r}_i,k}(b_k) = \frac{G_{\mathrm{r}_i,\mathrm{d}}(k){x_\mathrm{th}}^2}{(\sum_{\mathrm{r}_i:\mathrm{r}_i\in\Psi_k(b_k),\mu_{\mathrm{r}_i}=0} G_{\mathrm{r}_i,\mathrm{d}}(k))^2}$.
end if
```

After knowing x_o, we can find the optimum $\{P_{\mathrm{r}_i,k} | \forall\ \mathrm{r}_i \in \Psi\}$ to (19) when $x = x_\mathrm{o}$ as $\{P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$. Note that in the third case x_o can be any value no smaller than x_th, and $\{P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi_k(b_k), \mu_{\mathrm{r}_i} = 0\}$ can be any set of nonnegative values satisfying (23) with $x = x_\mathrm{o}$. To improve the system energy efficiency, we choose $x_\mathrm{o} = x_\mathrm{th}$, and $\forall\ \mathrm{r}_i : \mathrm{r}_i \in \Psi_k(b_k)$ and $\mu_{\mathrm{r}_i} = 0$, $P_{\mathrm{r}_i,k}(b_k) = \frac{G_{\mathrm{r}_i,\mathrm{d}}(k){x_\mathrm{th}}^2}{(\sum_{\mathrm{r}_i:\mathrm{r}_i\in\Psi_k(b_k),\mu_{\mathrm{r}_i}=0} G_{\mathrm{r}_i,\mathrm{d}}(k))^2}$ to minimize the sum power of the relays.

The overall algorithm of finding $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$ is summarized in **Algorithm 3**. Based on the above analysis, it can be seen that the η_k corresponding to $\{P_{\mathrm{s},k}(b_k), P_{\mathrm{r}_i,k}(b_k) | \forall\ \mathrm{r}_i \in \Psi\}$ and b_k must be equal to or smaller than $P_{\mathrm{s},k}(b_k)G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)$.

IV. THE ITERATIVE RA ALGORITHM

In case (8) has a nonzero duality gap, **Algorithm 1** fails to find a globally optimum solution. To address this issue, we will develop in this section a coordinate-ascent based iterative algorithm which is suboptimum but always applicable regardless of the duality gap of (8).

A. The iterative RA algorithm

First of all, it should be noted that $R_{k,1} \leq R_{k,2}$ always holds independently of $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\,\mathrm{r}_i \in \Psi\}$ when b_k satisfies $G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k) \leq G_{\mathrm{s},\mathrm{d}}(k)$. This means that when $\max_{\mathrm{r}_i} G_{\mathrm{s},\mathrm{r}_i}(k) \leq G_{\mathrm{s},\mathrm{d}}(k)$, $t_k = 0$ is the optimum independently of b_k and $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\,\mathrm{r}_i \in \Psi\}$, i.e., the direct transmission mode should always be used for subcarrier k.

To simplify algorithm design, we assume t_k is fixed as 0 for every $k \in \mathcal{D}_a = \{k | \max_{\mathrm{r}_i} G_{\mathrm{s},\mathrm{r}_i}(k) \leq G_{\mathrm{s},\mathrm{d}}(k)\}$. If $k \notin \mathcal{D}_a$, the optimum t_k and b_k must lie in the set $\{0,1\} \times \mathcal{B}_k$, where × is the Cartesian product operator. Furthermore, when $\{t_k, b_k | \forall\,k \notin \mathcal{D}_a\}$ is fixed, (8) is reduced to a concave maximization problem, which has zero duality gap since the Slater constraint qualification is satisfied. Thus a globally optimum $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\,\mathrm{r}_i \in \Psi, \forall\,k\}$ and the maximum sum rate when $\{t_k, b_k | \forall\,k \notin \mathcal{D}_a\}$ is fixed can be found with a duality based algorithm as shown later.

Now the difficulty of solving (8) lies in finding the optimum $\{t_k, b_k | \forall\,k \notin \mathcal{D}_a\}$. To this end, one may use an exhaustive-search based algorithm. Specifically, this algorithm finds the maximum sum rate for each possible $\{t_k, b_k | \forall\,k \notin \mathcal{D}_a\}$ in $\prod_{k\notin\mathcal{D}_a}(\{0,1\} \times \mathcal{B}_k)$. Then it chooses the best one as the optimum $\{t_k, b_k | \forall\,k \notin \mathcal{D}_a\}$. However, the complexity of exhaustive search might be unaffordable for practical systems using a big number of subcarriers.

To address this issue, we develop a coordinate-ascent based iterative algorithm which produces a successive set of RAs with nondecreasing sum rate until convergence. In the following, a superscript m added to a variable indicates that variable is produced at the m-th iteration to facilitate description. At the beginning, $\forall\ k \notin \mathcal{D}_a$, t_k^1 and b_k^1 are initialized as 1 and N, respectively, i.e. every subcarrier not in $\mathcal{D}_a$ is set in the relay-aided mode with only the relay having the highest source-relay channel gain enabled for assisting. In the m-th iteration, $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\,\mathrm{r}_i \in \Psi, \forall\,k\}$, which is the optimum solution to (8) when $t_k = t_k^m$ and $b_k = b_k^m$, $\forall\ k \notin \mathcal{D}_a$, is first found with a duality based algorithm, namely **Algorithm 5** developed in Section IV-B. This step can be interpreted as finding the optimum source/relay power allocation when $\{t_k, b_k | \forall\,k \notin \mathcal{D}_a\}$ is fixed as $\{t_k^m, b_k^m | \forall\,k \notin \mathcal{D}_a\}$.

Then, $\{t_k^{m+1}, b_k^{m+1} | \forall\,k \notin \mathcal{D}_a\}$ which maximizes the sum rate is found when the power allocation is fixed as $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\,\mathrm{r}_i \in \Psi, \forall\,k\}$. This step can be interpreted as finding the optimum mode and assisting relays

Algorithm 4 The iterative RA algorithm

```
$\forall\, k \in \mathcal{D}_a$, $t_k = 0$; $\forall\, k \notin \mathcal{D}_a$, $t_k^1 = 1$ and $b_k^1 = N$;
$m = m + 1$;
repeat
    Find $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$ as the optimum solution to (8) when $t_k = t_k^m$ and $b_k = b_k^m$, $\forall\, k \notin \mathcal{D}_a$ with Algorithm 5;
    for every $k \notin \mathcal{D}_a$ do
        if $t_k^m = 0$ then
            $t_k^{m+1} = 0$;
        else
            Compute $\eta_k^m(b_k^m)$, $R_{k,1}^m(b_k^m)$, and $R_{k,2}^m$;
            if $R_{k,1}^m(b_k^m) < R_{k,2}^m$ then
                $t_k^{m+1} = 0$;
            else
                $t_k^{m+1} = 1$;
                $b_k^{m+1}$ is set as the minimum $i$ satisfying $\eta_k^m(b_k^m) \leq P_{\mathrm{s},k}^m G_{\mathrm{s},\mathrm{r}_i(k)}(k)$;
            end if
        end if
    end for
    $m = m + 1$;
until $\forall\, k \notin \mathcal{D}_a$, $\{t_k^{m+1}, b_k^{m+1}\}$ is equal to $\{t_k^m, b_k^m\}$
$\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m, \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$ and $\{t_k^m, b_k^m, \forall\, k \notin \mathcal{D}_a, t_k, b_k, \forall\, k \in \mathcal{D}_a\}$ produced in the last iteration are the suboptimum solution.
```

when the source/relay power allocation is prescribed by $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$. Note that this can be accomplished on a per subcarrier basis, i.e., for every subcarrier $k \notin \mathcal{D}_a$, t_k^{m+1} and b_k^{m+1} are found to maximize the rate when the power allocation is fixed as $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\, \mathrm{r}_i \in \Psi\}$. In this case, the rate is denoted by $R_{k,2}^m = 2\log_2(1 + \frac{P_{\mathrm{s},k}^m}{2} G_{\mathrm{s,d}}(k))$ if the direct mode is used. If the relay-aided mode with a given b_k is used, the rate is denoted by $R_{k,1}^m(b_k) = \log_2(1 + \min(\eta_k^m(b_k), P_{\mathrm{s},k}^m G_{\mathrm{s},\mathrm{r}_{b_k}(k)}(k)))$ where $\eta_k^m(b_k)$ represents the SNR of MRC at the destination,

Let's first consider the evaluation of t_k^{m+1} and b_k^{m+1} when $t_k^m = 0$, meaning that subcarrier k was set in the direct mode when $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$ was evaluated. Suppose the relay-aided mode with any b_k^{m+1} is now used instead, the rate is reduced independently of b_k^{m+1} because of

$$\begin{aligned} R_{k,1}^m(b_k^{m+1}) &= \log_2(1 + \min(\eta_k^m(b_k^{m+1}), P_{\mathrm{s},k}^m G_{\mathrm{s},\mathrm{r}_{b_k^{m+1}(k)}}(k))) \\ &\leq \log_2(1 + \eta_k^m(b_k^{m+1})) \\ &= \log_2(1 + P_{\mathrm{s},k}^m G_{\mathrm{s,d}}(k)) \leq R_{k,2}^m, \end{aligned}$$

where the equality in the third line is because of $\forall\, \mathrm{r}_i \in \Psi$, $P_{\mathrm{r}_i,k}^m = 0$ as will be shown in Section IV-B. In order to maximize the rate, $t_k^{m+1} = 0$, i.e. subcarrier k remains in the direct mode.

Next, we consider the evaluation of t_k^{m+1} and b_k^{m+1} when $t_k^m = 1$, meaning that subcarrier k was set in the relay-aided mode with $b_k = b_k^m$ when $\{P_{\mathrm{s},k}^m, P_{\mathrm{r}_i,k}^m | \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$ was evaluated. As will be shown in Section IV-B, $\eta_k^m(b_k^m) \leq P_{\mathrm{s},k}^m G_{\mathrm{s},\mathrm{r}_{b_k^m}(k)}(k)$ always holds and thus $R_{k,1}^m(b_k^m) = \log_2(1 + \eta_k^m(b_k^m))$. It can readily be seen from (5) that if $b_k > b_k^m$, $\eta_k^m(b_k) \leq \eta_k^m(b_k^m)$, while $\eta_k^m(b_k) = \eta_k^m(b_k^m)$ if $b_k \leq b_k^m$, since $\forall\, \mathrm{r}_i \notin \Psi_k(b_k^m)$, $P_{\mathrm{r}_i,k}^m = 0$ as will be shown in Section IV-B. This means that $\forall\, b_k$, $R_{k,1}^m(b_k) \leq \log_2(1 + \eta_k^m(b_k)) \leq R_{k,1}^m(b_k^m)$, i.e., if subcarrier k remains in the relay-aided mode, the rate can not be increased no matter which value is assigned to b_k. In this case, t_k^{m+1} and b_k^{m+1} are determined in one of the following cases:

- if $R_{k,2}^m > R_{k,1}^m(b_k^m)$, t_k^{m+1} is set as 0 since the rate is increased if the direct mode is used;
- if $R_{k,2}^m \leq R_{k,1}^m(b_k^m)$, t_k^{m+1} is still set as 1. b_k^{m+1} is assigned as the smallest b_k satisfying $R_{k,1}^m(b_k) = R_{k,1}^m(b_k^m)$. Obviously, $b_k^{m+1} \leq b_k^m$, and $\Psi_k(b_k^{m+1})$ is the biggest set of assisting relays that leads to the same rate as $\Psi_k(b_k^m)$. The motivation behind this assignment is twofold. One is to guarantee the rate when $b_k = b_k^{m+1}$ is no smaller than when $b_k = b_k^m$. The other is to increase the degrees of freedom for optimizing the power allocation in the next iteration, since $\forall\, \mathrm{r}_i : \mathrm{r}_i \in \Psi_k(b_k^{m+1})$ and $\mathrm{r}_i \notin \Psi_k(b_k^m)$, $P_{\mathrm{r}_i,k}^m = 0$ always holds but $P_{\mathrm{r}_i,k}$ is free to be optimized in the $(m+1)$-th iteration. It can easily be shown that b_k^{m+1} is actually equal to the minimum i satisfying $\eta_k^m(b_k^m) \leq P_{\mathrm{s},k}^m G_{\mathrm{s},\mathrm{r}_i(k)}(k)$. Note that $G_{\mathrm{s},\mathrm{r}_{b_k^{m+1}(k)}}(k) \geq \frac{\eta_k^m(b_k^m)}{P_{\mathrm{s},k}^m} \geq G_{\mathrm{s,d}}(k)$, which means that $b_k^{m+1} \in \mathcal{B}_k$.

It can easily be seen that a successive set of RAs with nondecreasing sum rate are produced as the iteration proceeds. After the algorithm converges, the RA produced by the last iteration is output as a suboptimum solution. This RA is at least a locally optimum solution to (8) (please refer to pages 160-162 of [26] for more details). In summary, the iterative algorithm is described in **Algorithm 4**.

B. Algorithm to solve (8) *when t_k and b_k are fixed*

When $t_k = t_k^m$ and $b_k = b_k^m$, $\forall\, k \notin \mathcal{D}_a$, and $t_k = 0$, $\forall\, k \in \mathcal{D}_a$, (8) is equivalent to

$$\begin{aligned} \max \quad & \sum_{k=1, k\notin\mathcal{D}_a}^{K} (t_k^m R_{k,1} + (1 - t_k^m) R_{k,2}) + \sum_{k\in\mathcal{D}_a} R_{k,2} \\ \text{s.t.} \quad & \sum_{k=1}^{K} P_{\mathrm{s},k} \leq 1, \quad \sum_{k=1}^{K} P_{\mathrm{r}_i,k} \leq 1, \quad \forall\, \mathrm{r}_i, \\ & P_{\mathrm{s},k} \geq 0, \forall\, k, \quad P_{\mathrm{r}_i,k} \geq 0, \forall\, k, \forall\, \mathrm{r}_i \in \Psi, \end{aligned} \tag{30}$$

which has zero duality gap as shown earlier, and therefore can be solved with a duality based algorithm. To this end, we define the dual variables ν_{s} and ν_{r_i} related to the sum power constraints of the source and r_i, respectively. Let's stack ν_{s} and $\{\nu_{\mathrm{r}_i} | \forall\, \mathrm{r}_i \in \Psi\}$ into a vector $\boldsymbol{\nu}$, and $\{P_{\mathrm{s},k}, P_{\mathrm{r}_i,k} | \forall\, \mathrm{r}_i \in \Psi, \forall\, k\}$ into a vector $\mathbf{P}$. Then, we define the Lagrangian as

$$\begin{aligned} W(\mathbf{P}, \boldsymbol{\nu}) = & \sum_{k=1, k\notin\mathcal{D}_a}^{K} (t_k^m R_{k,1} + (1 - t_k^m) R_{k,2}) + \sum_{k\in\mathcal{D}_a} R_{k,2} \\ & + \sum_{i=1}^{N} \nu_{\mathrm{s}} (1 - \sum_{k=1}^{K} P_{\mathrm{s},k}) + \sum_{i=1}^{N} \nu_{\mathrm{r}_i} (1 - \sum_{k=1}^{K} P_{\mathrm{r}_i,k}). \end{aligned}$$

The duality based algorithm looks for the optimum $\boldsymbol{\nu}$ with the subgradient based method. In each iteration, the optimum $\mathbf{P}$ that maximizes $W(\mathbf{P}, \boldsymbol{\nu})$ subject to the constraints $P_{\mathrm{s},k} \geq 0$, $P_{\mathrm{r}_i,k} \geq 0$, $\forall\, k$, $\forall\, \mathrm{r}_i \in \Psi$, denoted by $\mathbf{P}_{\boldsymbol{\nu}}$, is found when $\boldsymbol{\nu}$ is fixed. We denote $P_{\mathrm{s},k}$ and $P_{\mathrm{r}_i,k}$ contained in $\mathbf{P}_{\boldsymbol{\nu}}$ as $P_{\mathrm{s},k}(\boldsymbol{\nu})$ and $P_{\mathrm{r}_i,k}(\boldsymbol{\nu})$, respectively. Specifically, for subcarrier k with $t_k^m = 1$ and $b_k = b_k^m$, the problem of finding

Algorithm 5 The duality based RA algorithm to solve (8) when $t_k = t_k^m$ and $b_k = b_k^m$, $\forall\, k \notin \mathcal{D}_a$, and $t_k = 0$, $\forall\, k \in \mathcal{D}_a$

```
$j = 1$, $\boldsymbol{\nu} = \mathbf{1}$;
repeat
    $\nu_{\rm s} = [\nu_{\rm s} - \frac{1+Q_2}{j+Q_2}(1 - \sum_{k=1}^{K} P_{{\rm s},k}(\boldsymbol{\nu}))]^+$;
    $\nu_{{\rm r}_i} = [\nu_{{\rm r}_i} - \frac{1+Q_2}{j+Q_2}(1 - \sum_{k=1}^{K} P_{{\rm r}_i,k}(\boldsymbol{\nu}))]^+$, $\forall\, {\rm r}_i \in \Psi$;
    $j = j + 1$;
    for $k = 1$ to $N$ do
        if $k \in \mathcal{D}_a$ or $k \notin \mathcal{D}_a$ with $t_k^m = 0$ then
            $P_{{\rm s},k}(\boldsymbol{\nu})$ and $P_{{\rm r}_i,k}(\boldsymbol{\nu})$, $\forall\, {\rm r}_i$ are found with (14) and (15) after replacing $\mu_{\rm s}$ with $\nu_{\rm s}$;
        else if $k \notin \mathcal{D}_a$ with $t_k^m = 1$ then
            $P_{{\rm s},k}(\boldsymbol{\nu})$ and $P_{{\rm r}_i,k}(\boldsymbol{\nu})$, $\forall\, {\rm r}_i$ are found with Algorithm 3 after replacing $\{b_k, \mu_{\rm s}, \mu_{{\rm r}_i} | \forall\, {\rm r}_i \in \Psi\}$ with $\{b_k^m, \nu_{\rm s}, \nu_{{\rm r}_i} | \forall\, {\rm r}_i \in \Psi\}$;
        end if
    end for
until $\mathbf{P}_{\boldsymbol{\nu}}$ is feasible for (30) and
$\nu_{\rm s}(1 - \sum_{k=1}^{K} P_{{\rm s},k}(\boldsymbol{\nu})) + \sum_{{\rm r}_i \in \Psi} \nu_{{\rm r}_i}(1 - \sum_{k=1}^{K} P_{{\rm r}_i,k}(\boldsymbol{\nu})) < \epsilon$
$P_{{\rm s},k}(\boldsymbol{\nu})$, and $P_{{\rm r}_i,k}(\boldsymbol{\nu})$, $\forall {\rm r}_i \in \Psi$ produced in the last iteration are the optimum solution to (8) when $t_k = t_k^m$ and $b_k = b_k^m$, $\forall\, k \notin \mathcal{D}_a$, and $t_k = 0$, $\forall\, {\rm r}_i \in \mathcal{D}_a$.
```

$\{P_{{\rm s},k}(\boldsymbol{\nu}), P_{{\rm r}_i,k}(\boldsymbol{\nu}) | \forall\, {\rm r}_i \in \Psi\}$ is equivalent to (17) with $b_k = b_k^m$, $\mu_{\rm s} = \nu_{\rm s}$, and $\mu_{{\rm r}_i} = \nu_{{\rm r}_i}$, $\forall\, {\rm r}_i \in \Psi$, and therefore can be solved with **Algorithm 3** after replacing $\{b_k, \mu_{\rm s}, \mu_{{\rm r}_i} | \forall\, {\rm r}_i \in \Psi\}$ with $\{b_k^m, \nu_{\rm s}, \nu_{{\rm r}_i} | \forall\, {\rm r}_i \in \Psi\}$. It is important to note that the η_k corresponding to $\{P_{{\rm s},k}(\boldsymbol{\nu}), P_{{\rm r}_i,k}(\boldsymbol{\nu}) | \forall\, {\rm r}_i \in \Psi\}$ and $b_k = b_k^m$ must be equal to or smaller than $P_{{\rm s},k}(\boldsymbol{\nu}) G_{{\rm s},{\rm r}_{b_k^m}(k)}(k)$, according to the analysis at the end of Section III.B. For subcarrier k with $t_k^m = 0$ or in $\mathcal{D}_a$, the problem of finding $\{P_{{\rm s},k}(\boldsymbol{\nu}), P_{{\rm r}_i,k}(\boldsymbol{\nu}) | \forall\, {\rm r}_i \in \Psi\}$ is equivalent to (12) with $t_k = 0$, $\mu_{\rm s} = \nu_{\rm s}$, and $\mu_{{\rm r}_i} = \nu_{{\rm r}_i}$, $\forall\, {\rm r}_i \in \Psi$, and therefore can be solved with (14) and (15) after replacing $\mu_{\rm s}$ with $\nu_{\rm s}$. Note that $\forall {\rm r}_i \in \Psi$, $P_{{\rm r}_i,k}(\boldsymbol{\nu}) = 0$ if $k \in \mathcal{D}_a$ or $t_k^m = 0$, and $\forall {\rm r}_i \notin \Psi_k(b_k^m)$, $P_{{\rm r}_i,k}(\boldsymbol{\nu}) = 0$ if $t_k^m = 1$.

The overall algorithm is summarized as **Algorithm 5**. The step size and the termination condition are chosen in the same way as in **Algorithm 1**. Specifically, we choose $\delta_j = \frac{1+Q_2}{j+Q_2}$ (Q_2 is a prescribed positive integer) which satisfies the diminishing conditions as proposed in [26]. Based on the analysis in Section III, the finally produced $\mathbf{P}_{\boldsymbol{\nu}}$ corresponds to a sum rate no smaller than $z^\star - \epsilon$ ($z^\star$ represents the maximum objective of (30)).

V. NUMERICAL EXPERIMENTS

For illustration purposes, we consider an OFDM transmission system aided by 6 DF relays shown in Figure 3. The source is located at the origin, the destination is located at the coordinate $(0, -15)$, and ${\rm r}_i$, $i = 1, \cdots, 6$, is located at the coordinates $(-6, -7)$, $(-4, -7)$, $(-2, -7)$, $(2, -7)$, $(4, -7)$, and $(6, -7)$, respectively. Note that all the aforementioned coordinate-related values have the unit of meter. The parameters are set as $\sigma^2 = -50$ dBW, $\epsilon = 0.1$, $Q_1 = Q_2 = 50$, and the duration of one time slot is 1 millisecond. In numerical experiments, we found that the convergence of **Algorithm 1** was always observed when $K \geq 256$. Thus we choose $K = 256$.

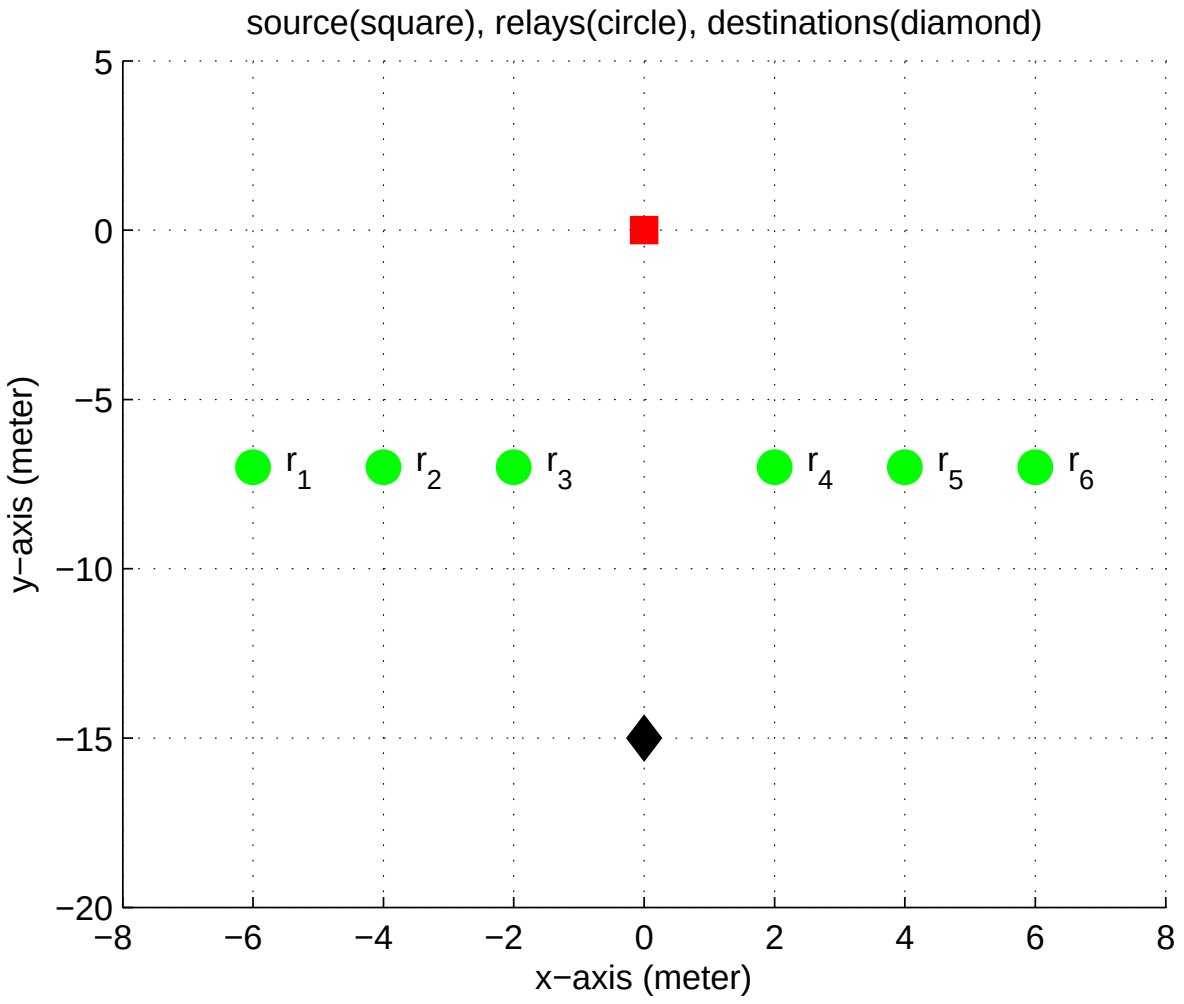

Fig. 3. A DF relays aided OFDM transmission system considered in numerical experiments.

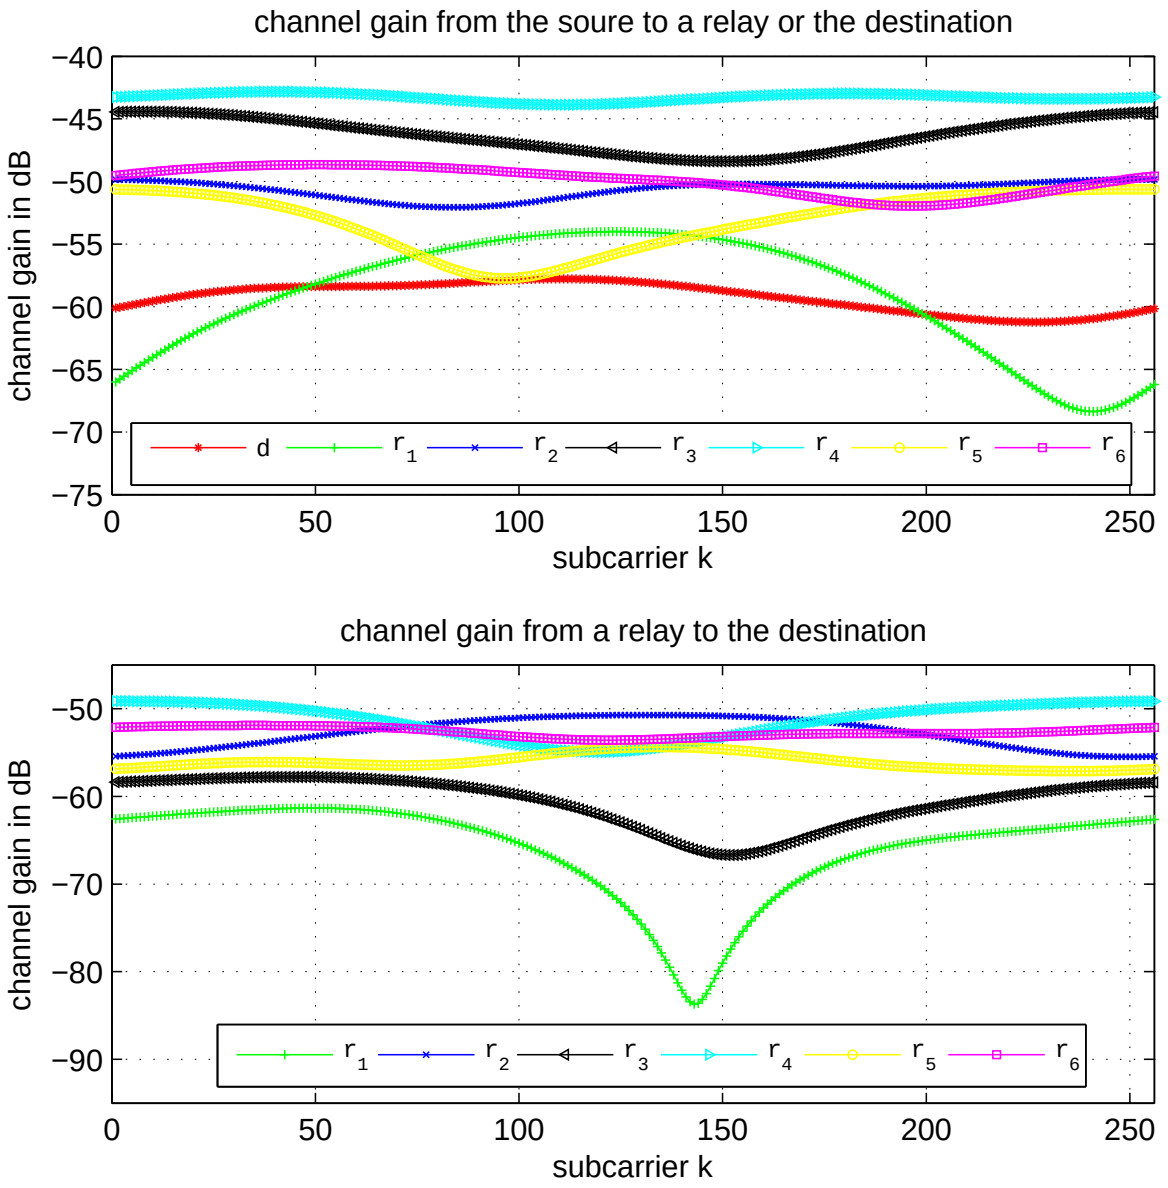

Fig. 4. A random channel gain realization.

We generate every channel according to the following assumptions. First, it is modeled as a 6-tap delay line, and the average received power at a distance of d is equal to ξd^{-3}, where ξ represents a log-normal shadowing effect of 1 dB (i.e., $10\log_{10}(\xi)$ is Gaussian distributed with zero mean and variance equal to 1 dB). Second, we assume the amplitude of the i-th tap is a circularly symmetric complex Gaussian random variable with zero mean and variance as $\sigma_i^2 = \sigma_0^2 e^{-3i}$, $i = 0, 1, \cdots, 5$.

In order to illustrate the effectiveness of the proposed algorithms, we consider a heuristic RA algorithm against which the proposed RA algorithms are compared. This heuristic algorithm allocates the source sum power uniformly to all subcarriers, i.e., $P_{{\rm s},k} = \frac{1}{K}$. Then, for every ${\rm r}_i$, $\Omega_{{\rm r}_i} =$

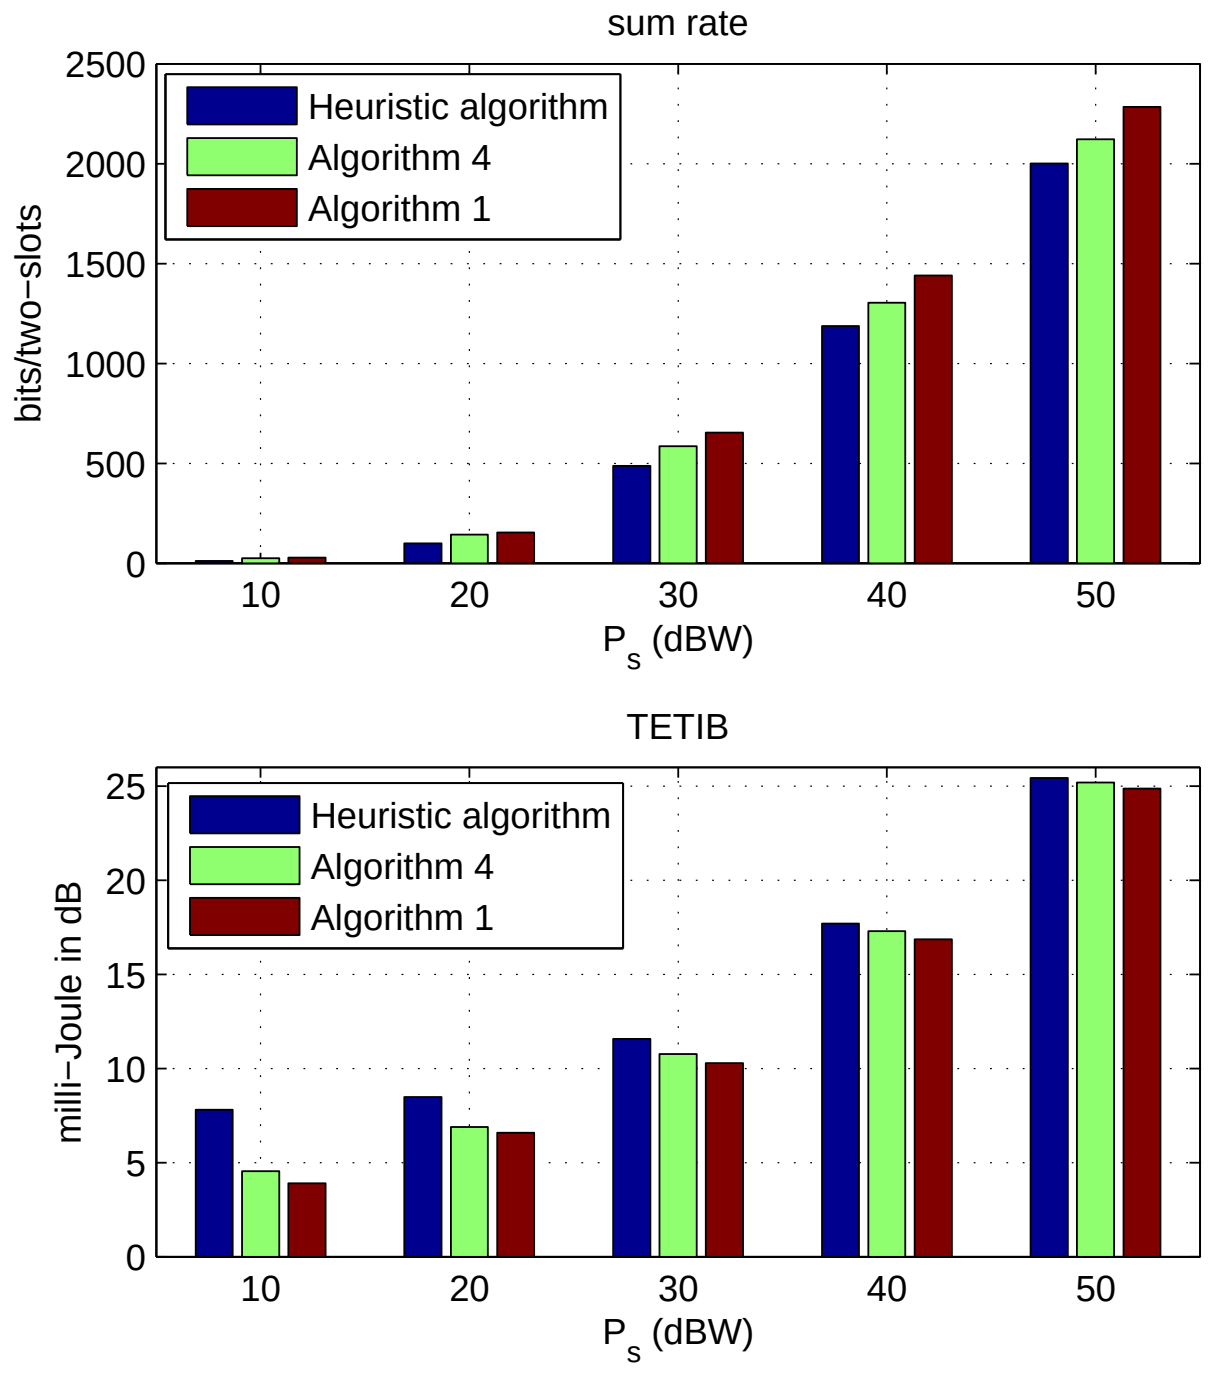

Fig. 5. For the RA evaluated by each algorithm, the sum rate and the TETIB when $P_s = P_{\mathrm{r}_i}$, $\forall\ \mathrm{r}_i \in \Psi$, and P_s varies from 10 to 50 dBW.

$\{k|k \notin \mathcal{D}_a, G_{\mathrm{s},\mathrm{r}_i}(k) = \max_{\mathrm{r}_j\in\Psi} G_{\mathrm{s},\mathrm{r}_j}(k)\}$ which contains every subcarrier not belonging to $\mathcal{D}_a$ and at which r_i has the maximum source to relay channel gain, is first found. The sum power of r_i is uniformly allocated to all subcarriers in Ω_{r_i} (i.e., if $k \notin \Omega_{\mathrm{r}_i}$, $P_{\mathrm{r}_i,k} = 0$, otherwise $P_{\mathrm{r}_i,k} = \frac{1}{|\Omega_{\mathrm{r}_i}|}$ where $|\Omega_{\mathrm{r}_i}|$ denotes the number of subcarriers in Ω_{r_i}). For every subcarrier $k \in \mathcal{D}_a$, the direct transmission mode is used. For every subcarrier $k \notin \mathcal{D}_a$, $R_{k,2}$ is first computed, and then the $R_{k,1}$ when a single r_i with the maximum $G_{\mathrm{s},\mathrm{r}_i}(k)$ assists relaying is computed. If $R_{k,2}$ is equal to or greater than the computed $R_{k,1}$, the direct mode is used. Otherwise, the relay mode is used, and only the r_i used for computing $R_{k,1}$ assists relaying.

We have generated a single random channel realization as shown in Figure 4, and tested the three RA algorithms when $P_s = P_{\mathrm{r}_i}$, $\forall\ \mathrm{r}_i \in \Psi$, and P_s varies from 10 to 50 dBW. For the RA evaluated by each algorithm, the sum rate and the total energy of the source and the relays for transmitting per information bit (TETIB) are shown in Figure 5. We can see that for each P_s, either **Algorithm 1** or **Algorithm 4** produces a better RA with a higher sum rate and a lower TETIB than the heuristic algorithm, and **Algorithm 1** produces a better RA than **Algorithm 4**. Moreover, the RA evaluated by **Algorithm 1** or **Algorithm 4** results in a much smaller TETIB than that computed by the heuristic algorithm especially when P_s is low. For the sake of space limitation, the RAs evaluated by the three algorithms for the random channel realization only when $P_s = P_{\mathrm{r}_i} = 20$ dBW, $\forall\ \mathrm{r}_i \in \Psi$, are shown in Figure 6, 7, and 8, respectively. When the RA evaluated by **Algorithm 1** is used, r_3 and r_4 are enabled to assist relaying simultaneously at

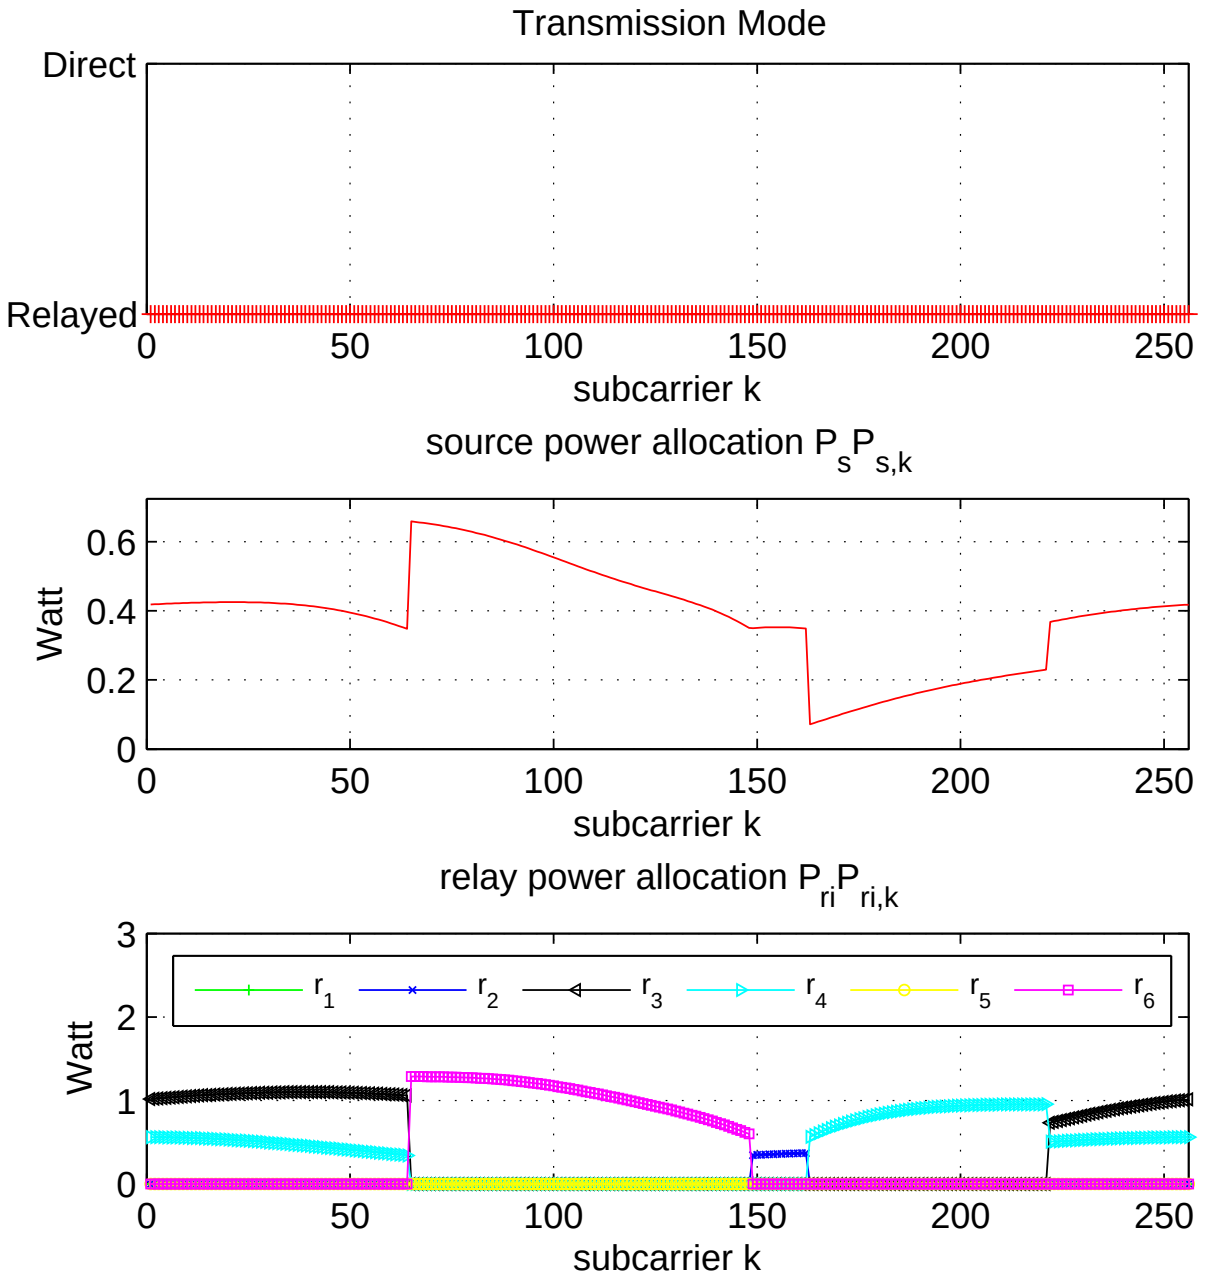

Fig. 6. The RA evaluated by **Algorithm 1** for the random channel realization when $P_s = P_{\mathrm{r}_i} = 20$ dBW, $\forall\ \mathrm{r}_i \in \Psi$.

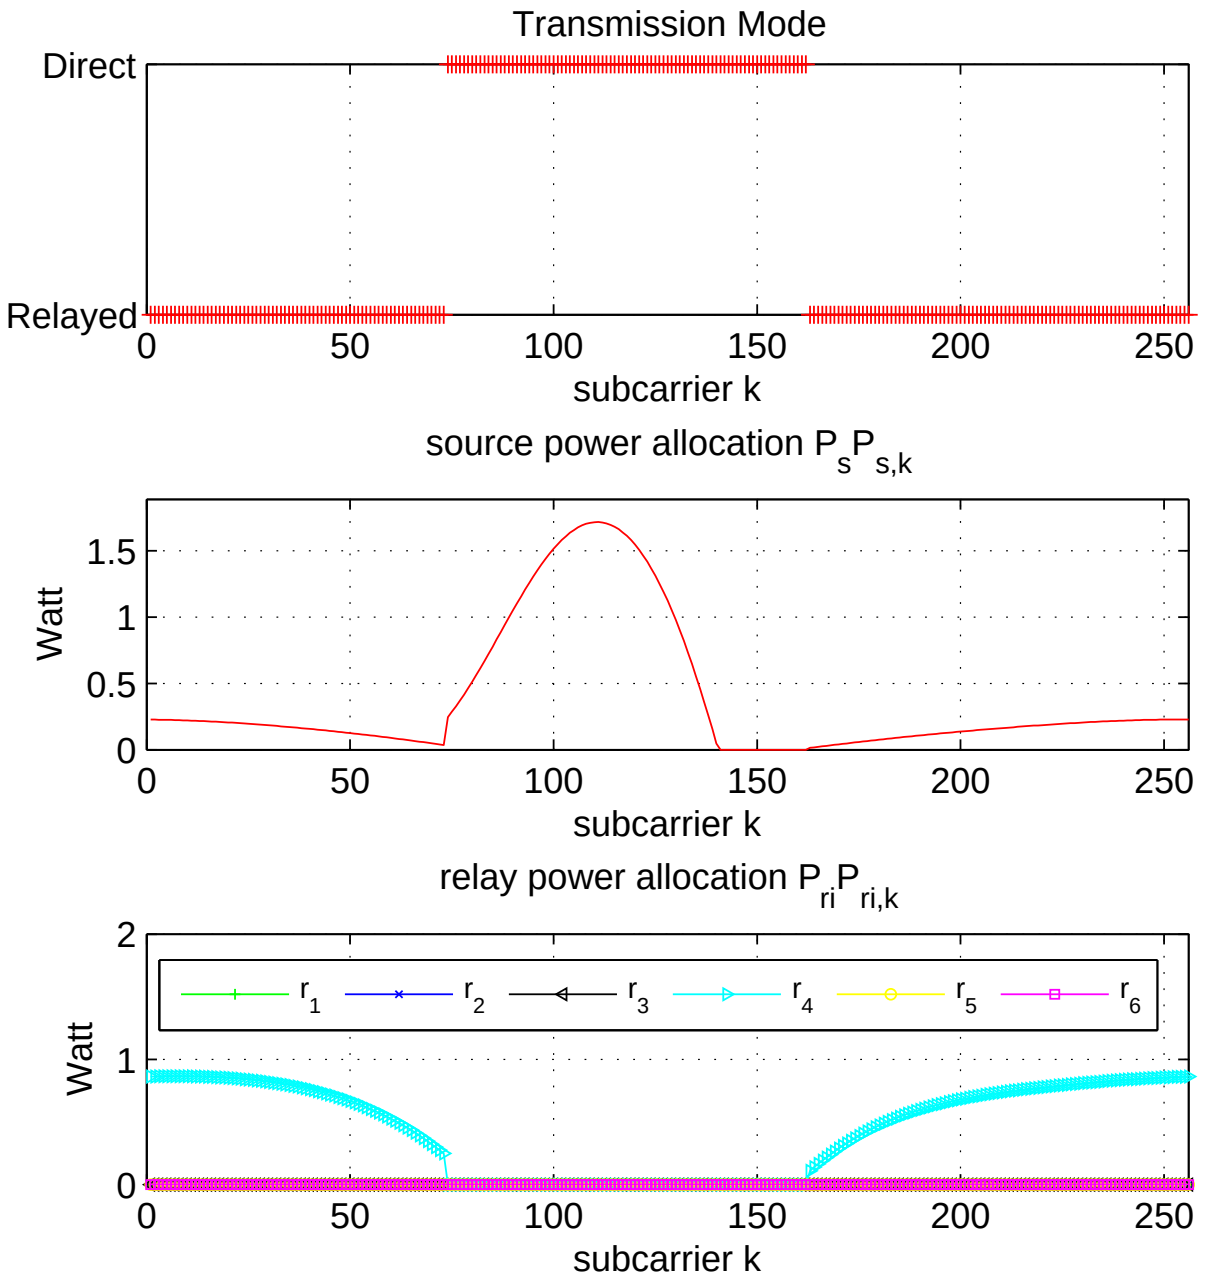

Fig. 7. The RA evaluated by **Algorithm 4** for the random channel realization when $P_s = P_{\mathrm{r}_i} = 20$ dBW, $\forall\ \mathrm{r}_i \in \Psi$.

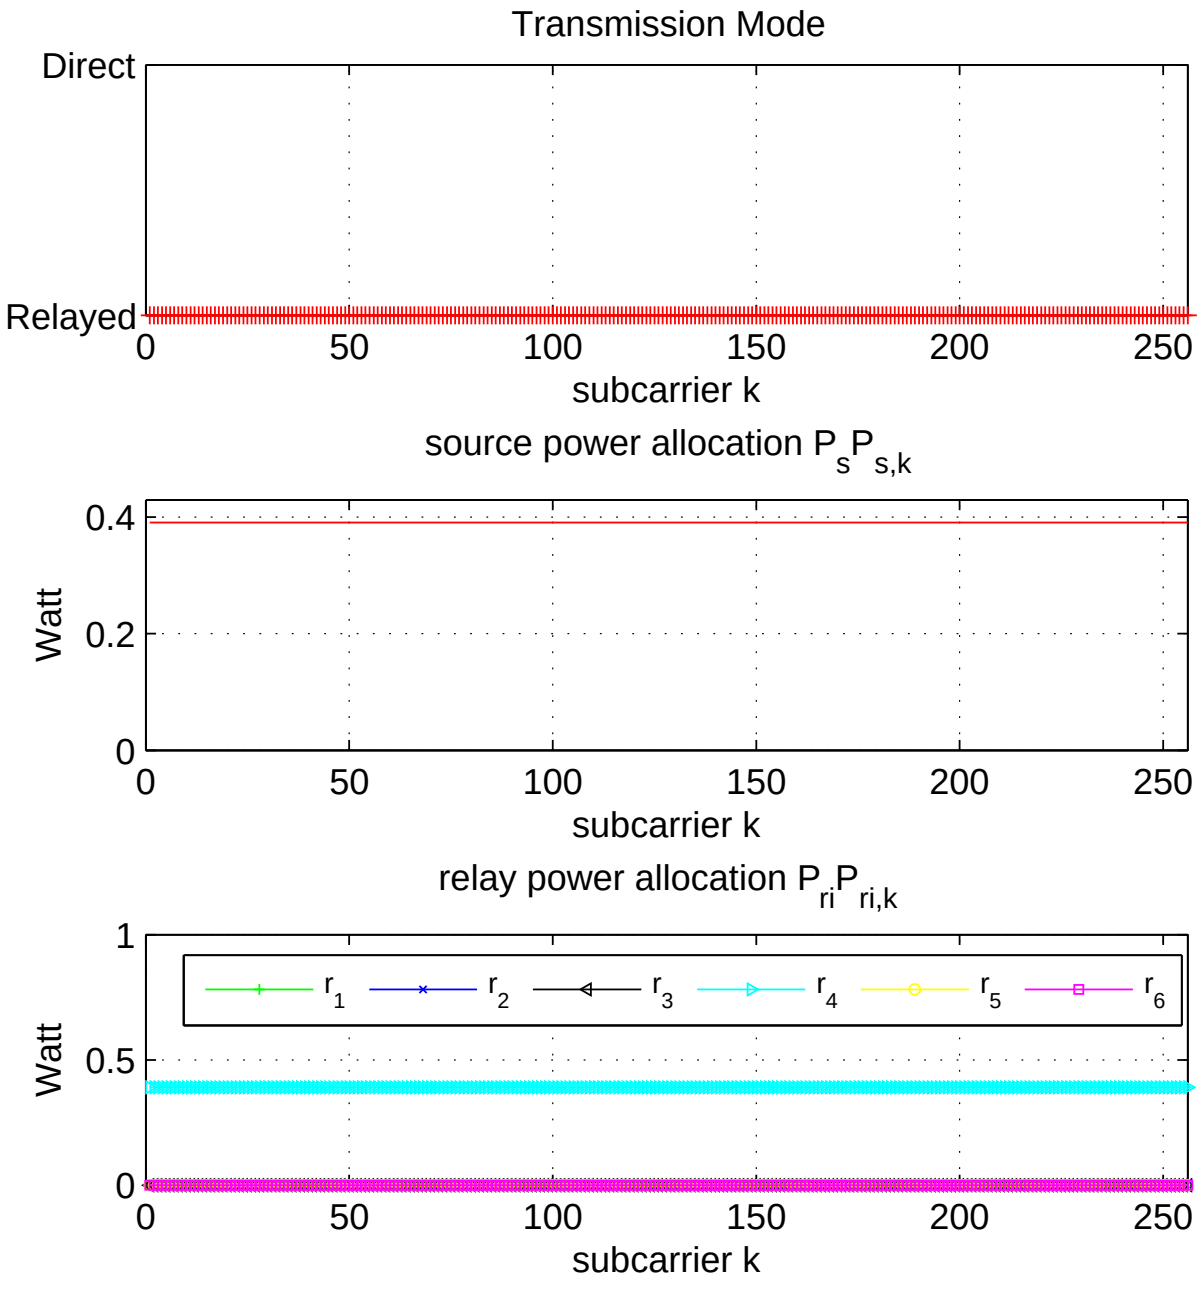

Fig. 8. The RA evaluated by the heuristic algorithm for the random channel realization when $P_s = P_{\mathrm{r}_i} = 20$ dBW, $\forall\, \mathrm{r}_i \in \Psi$.

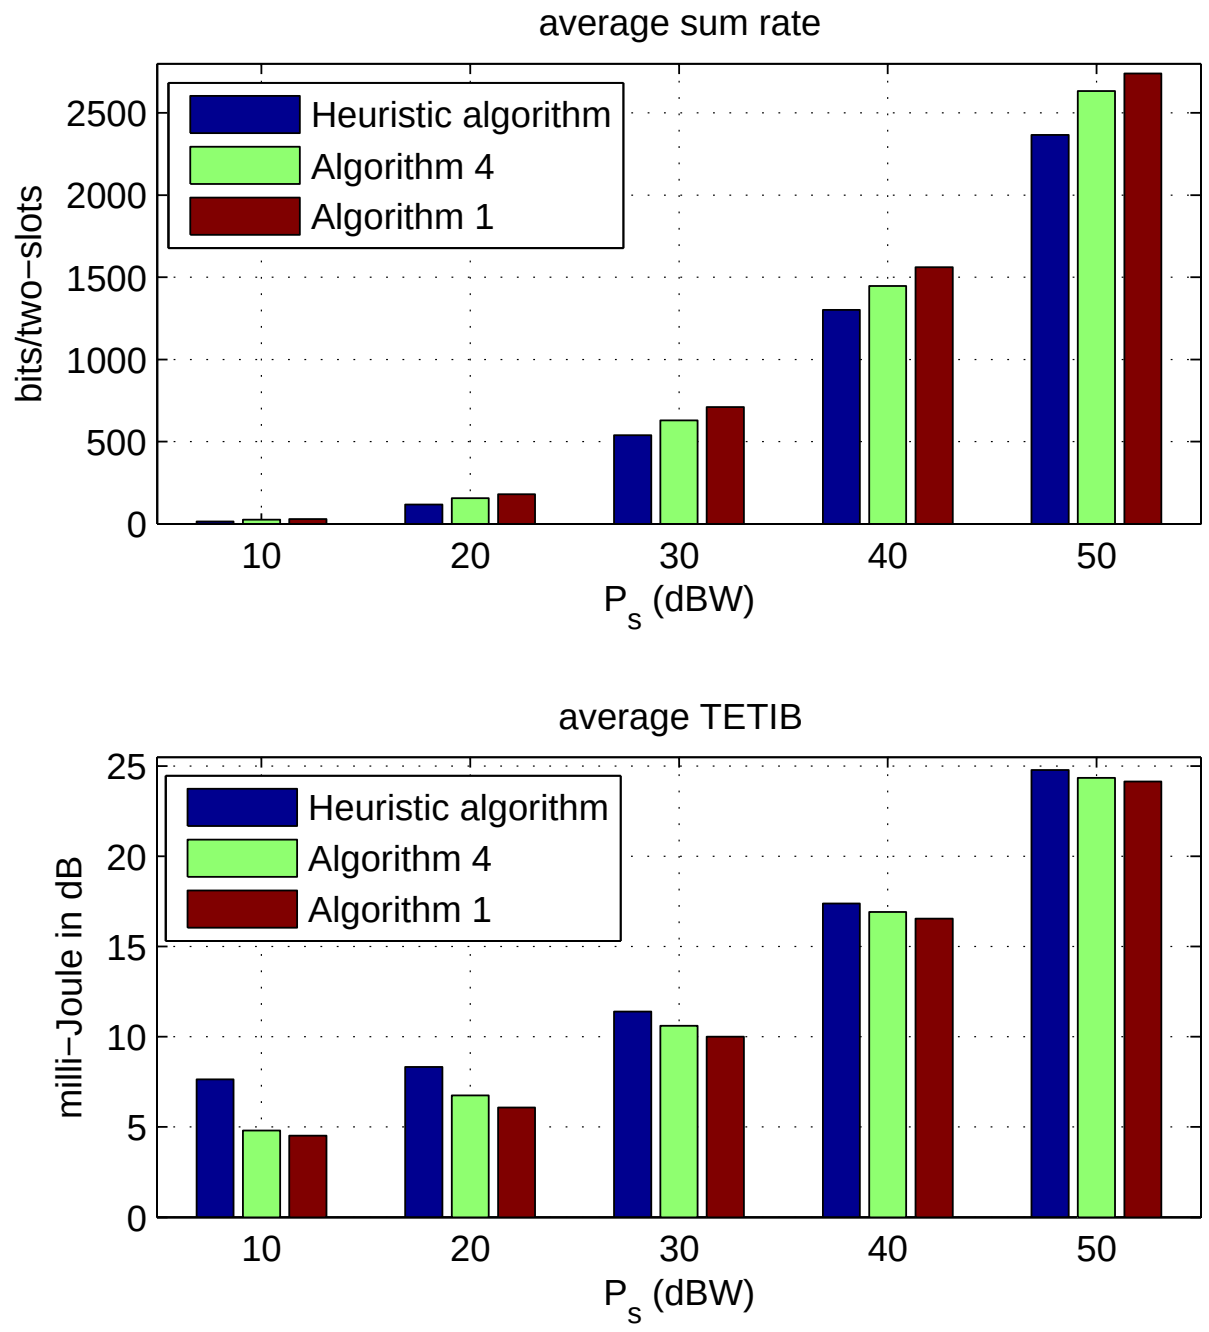

Fig. 9. For the RAs evaluated by each algorithm, the average sum rate and the average TETIB over 100 random channel realizations when $P_s = P_{\mathrm{r}_i}$, $\forall\, \mathrm{r}_i \in \Psi$, and P_s varies from 10 to 50 dBW.

a few subcarriers, while only r_4 does when the RA computed by **Algorithm 4** or the heuristic algorithm is used.

We have also generated 100 random channel realizations, and tested the three RA algorithms when $P_s = P_{\mathrm{r}_i}$, $\forall\, \mathrm{r}_i \in \Psi$, and P_s varies from 10 to 50 dBW. For the RAs evaluated by each algorithm, the average sum rate and the average TETIB are shown in Figure 9. It can be seen that for each P_s, either **Algorithm 4** or **Algorithm 1** produces better RAs with a higher average sum rate and a lower average TETIB than the heuristic algorithm, and **Algorithm 1** produces better RAs than **Algorithm 4**. Moreover, the RAs evaluated by **Algorithm 1** or **Algorithm 4** result in a much smaller average TETIB than those computed by the heuristic algorithm especially when P_s is low.

VI. CONCLUSION

We have considered the sum rate maximized RA problem in a point to point OFDM transmission system assisted by multiple DF relays subject to the individual sum power constraints of the source and relays. In particular, one or several relays may cooperate with the source to transmit at every relay-aided subcarrier. We have proposed two RA algorithms which optimize the assignment of transmission mode and source power for every subcarrier, as well as the optimum assisting relays and the power allocation to them for every relay aided subcarrier. The effectiveness of the two algorithms has been illustrated by numerical experiments.

APPENDIX A

When the duality gap is equal to zero, the duality based algorithm is one of the state-of-the-art methods to find a globally optimum solution to (9). There exist two important theorems justifying the ability of the duality based algorithm to find a globally optimum solution to (9). The first (Proposition $3.3.4$ in [26]) is that $\mathbf{x}_{\boldsymbol{\mu}}$ is a globally optimum solution to (9), if it is feasible to (9) and $\boldsymbol{\mu}(\mathbf{1} - g(\mathbf{x}_{\boldsymbol{\mu}}))^T = 0$. The second (Proposition $5.1.4$ in [26]) is that the $\boldsymbol{\mu}$ satisfying the aforementioned conditions, denoted by $\boldsymbol{\mu}^\star$, must minimize $d(\boldsymbol{\mu})$ when $\boldsymbol{\mu} \succcurlyeq \mathbf{0}$.

In general, the duality gap of (9) can be studied with a visualization based method proposed in [26]. Specifically, we can plot a cloud of points collected in the set $\mathcal{S} = \{[\mathbf{p}, w] | \mathbf{p} = g(\mathbf{x}), w = f(\mathbf{x}), \mathbf{x} \in \mathcal{D}_{\mathbf{x}}\}$ in the hyperplane of $[\mathbf{p}, w]$ shown in Figure 10. Most interestingly, $d(\boldsymbol{\mu})$ is equal to the w-coordinate of the highest intersection between the line $\mathbf{p} = \mathbf{1}$ and a line passing through $\mathcal{S}$ and perpendicular to the vector $[-\boldsymbol{\mu}, 1]$. As shown in Fig. 10, the duality gap is equal to zero if the w-coordinate of the upper border of $\mathcal{S}$ is a concave function of $\mathbf{p}$. Mathematically, a point on the upper border of $\mathcal{S}$ has the coordinate $(\mathbf{p}, f(\mathbf{x}_{\mathbf{p}}))$, where

$$\mathbf{x}_{\mathbf{p}} = \arg \max_{\mathbf{x}: \mathbf{x} \in \mathcal{D}_{\mathbf{x}},\, g(\mathbf{x}) = \mathbf{p}} f(\mathbf{x}). \tag{31}$$

Based on the same idea first proposed in [23], we can show $f(\mathbf{x}_{\mathbf{p}})$ is a concave function of $\mathbf{p}$ when K is very large. This is equivalent to show that for any $\theta \in [0, 1]$,

$$f(\mathbf{x}_{\theta \mathbf{p}_1 + (1-\theta)\mathbf{p}_2}) \geq \theta f(\mathbf{x}_{\mathbf{p}_1}) + (1-\theta) f(\mathbf{x}_{\mathbf{p}_2}) \tag{32}$$

holds for any $\mathbf{p}_1$ and $\mathbf{p}_2$ stacking the sum power of the source and relays. Note that the above condition can be interpreted in a very interesting way as follows. Let's adopt the RAs $\mathbf{x}_{\mathbf{p}_1}$

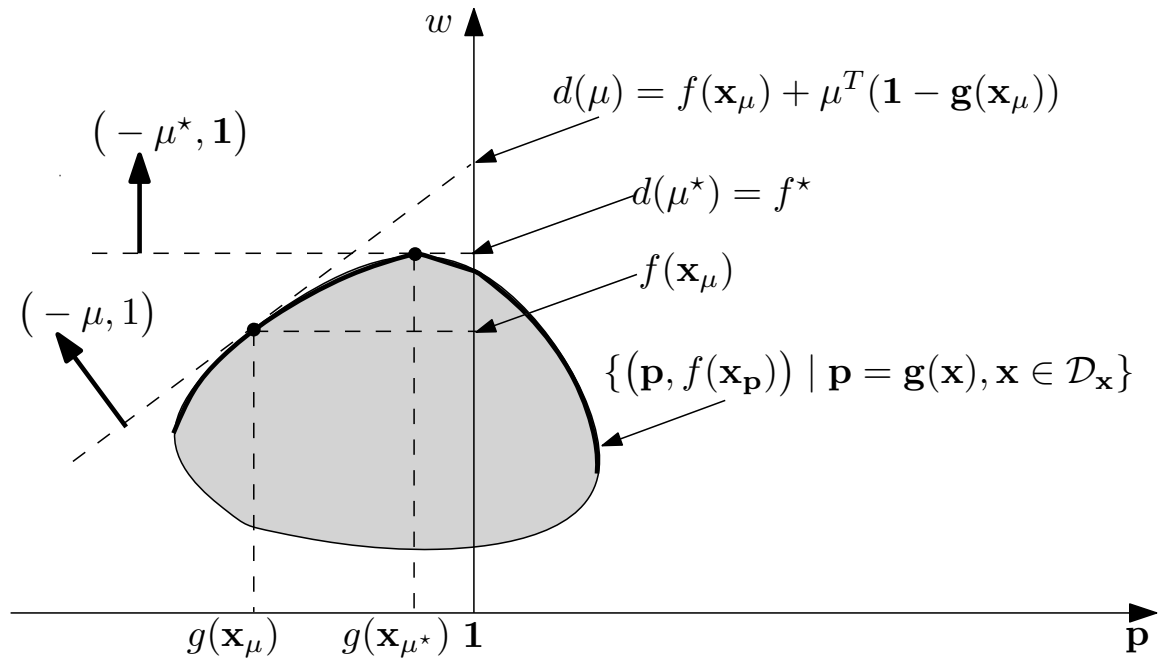
w
$d(\mu)=f(\mathbf{x}_\mu)+\mu^T(\mathbf{1}-\mathbf{g}(\mathbf{x}_\mu))$
$(-\mu^\star,\mathbf{1})$
$d(\mu^\star)=f^\star$
$f(\mathbf{x}_\mu)$
$(-\mu,1)$
$\{(\mathbf{p},f(\mathbf{x}_\mathbf{p}))\mid\mathbf{p}=\mathbf{g}(\mathbf{x}),\mathbf{x}\in\mathcal{D}_\mathbf{x}\}$
$g(\mathbf{x}_\mu)$
$g(\mathbf{x}_{\mu^\star})$
$\mathbf{1}$
$\mathbf{p}$

(a) When $f(\mathbf{x}_\mathbf{p})$ is a concave function of $\mathbf{p}$

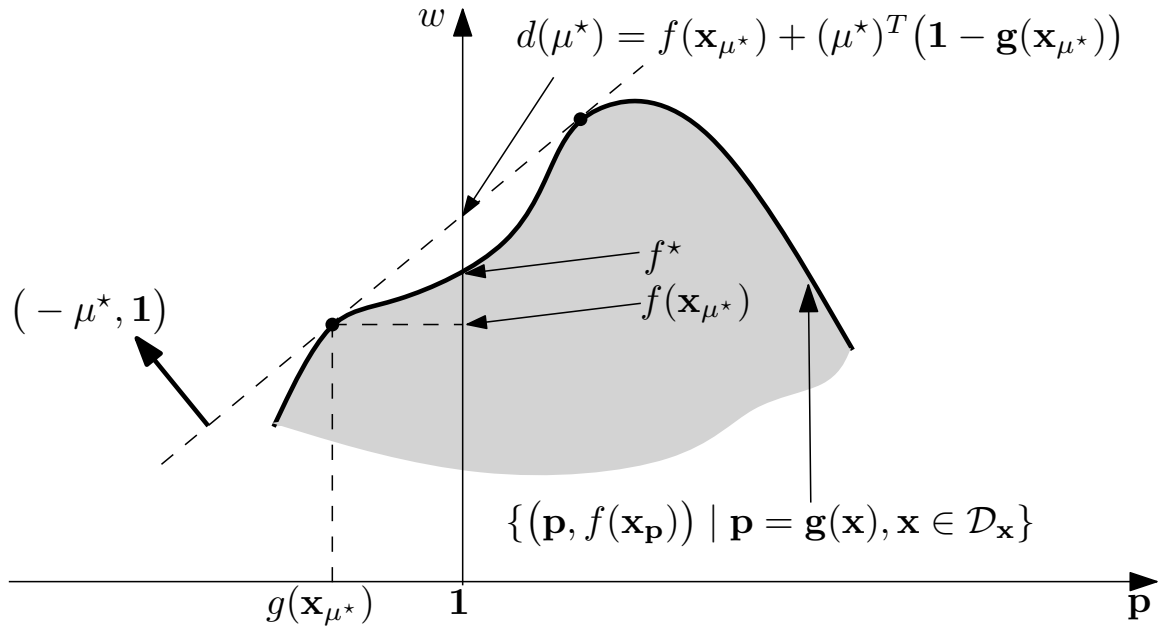
w
$d(\mu^\star)=f(\mathbf{x}_{\mu^\star})+(\mu^\star)^T(\mathbf{1}-\mathbf{g}(\mathbf{x}_{\mu^\star}))$
$f^\star$
$f(\mathbf{x}_{\mu^\star})$
$(-\mu^\star,\mathbf{1})$
$\{(\mathbf{p},f(\mathbf{x}_\mathbf{p}))\mid\mathbf{p}=\mathbf{g}(\mathbf{x}),\mathbf{x}\in\mathcal{D}_\mathbf{x}\}$
$g(\mathbf{x}_{\mu^\star})$
$\mathbf{1}$
$\mathbf{p}$

(b) When $f(\mathbf{x}_\mathbf{p})$ is not a concave function of $\mathbf{p}$

Fig. 10. The visualization of the duality gap in the hyperplane of $[\mathbf{p}, w]$.

and $\mathbf{x}_{\mathbf{p}_2}$ in the θ and $1-\theta$ portions of the whole transmission duration, respectively, which is called θ time sharing of $\mathbf{x}_{\mathbf{p}_1}$ and $\mathbf{x}_{\mathbf{p}_2}$ hereafter. In this way, an average sum rate $\theta f(\mathbf{x}_{\mathbf{p}_1})+(1-\theta)f(\mathbf{x}_{\mathbf{p}_2})$ can be achieved with an average sum power $\theta\mathbf{p}_1+(1-\theta)\mathbf{p}_2$. *This means that showing the validity of* (32) *for any* $\theta\in[0,1]$, *is equivalent to show that the optimum RA for the sum power* $\theta\mathbf{p}_1+(1-\theta)\mathbf{p}_2$ *provides a higher sum rate than* θ *time sharing of* $\mathbf{x}_{\mathbf{p}_1}$ *and* $\mathbf{x}_{\mathbf{p}_2}$.

To this end, we show in the following that when K is very large, a RA $\mathbf{x}'\in\mathcal{D}_\mathbf{x}$, which is of the sum power $\theta\mathbf{p}_1+(1-\theta)\mathbf{p}_2$ and yields a sum rate equal to θ time sharing of $\mathbf{x}_{\mathbf{p}_1}$ and $\mathbf{x}_{\mathbf{p}_2}$, can be constructed *by* θ *spectrum sharing of* $\mathbf{x}_{\mathbf{p}_1}$ *and* $\mathbf{x}_{\mathbf{p}_2}$, *i.e., taking the entries of* $\mathbf{x}_{\mathbf{p}_1}$ *at* θ *portion of all subcarriers, and the entries of* $\mathbf{x}_{\mathbf{p}_2}$ *at all the other subcarriers to construct* $\mathbf{x}'$. More specifically, we first divide all subcarriers into S subbands, each consisting of N_s adjacent subcarriers experiencing the same channel conditions. Suppose K is sufficiently large so that N_s is also very large, and $\forall\ \theta\in[0,1]$ there exists an integer N_θ in $\{1,\cdots,N_\mathrm{s}\}$ satisfying $\theta\approx\frac{N_\theta}{N_\mathrm{s}}$. Since the subcarriers in each subband experience the same channel conditions, the entries of $\mathbf{x}_{\mathbf{p}_1}$ (or $\mathbf{x}_{\mathbf{p}_2}$) at the subcarriers in the same subband should be the same. Let's construct $\mathbf{x}'$, which in every subband adopts for the first N_θ subcarriers the same entries as in $\mathbf{x}_{\mathbf{p}_1}$, and for the remaining $N_\mathrm{s}-N_\theta$ subcarriers the same entries as in $\mathbf{x}_{\mathbf{p}_2}$. We can easily show that the conditions $\mathbf{x}'\in\mathcal{D}_\mathbf{x}$ and

$$\begin{aligned} g(\mathbf{x}') &\approx \theta\mathbf{p}_1+(1-\theta)\mathbf{p}_2,\\ f(\mathbf{x}') &\approx \theta f(\mathbf{p}_1)+(1-\theta)f(\mathbf{p}_2) \end{aligned}$$

are all satisfied. Thus $f(\mathbf{x}_{\theta\mathbf{p}_1+(1-\theta)\mathbf{p}_2})\geq f(\mathbf{x}')\approx\theta f(\mathbf{p}_1)+(1-\theta)f(\mathbf{p}_2)$ holds. Therefore, the duality gap of (9) is equal to zero when K is very large.

ACKNOWLEDGEMENT

The authors would like to thank the anonymous reviewers for their valuable comments and suggestions.

REFERENCES

[1] R. Pabst, B. Walke, D. Schultz *et al.*, “Relay-based deployment concepts for wireless and mobile broadband radio,” *IEEE Communications Magazine*, vol. 42, no. 9, pp. 80–89, sept. 2004.

[2] J. N. Laneman and G. W. Wornell, “Distributed space-time-coded protocols for exploiting cooperative diversity in wireless networks,” *IEEE Transaction on Information Theory*, vol. 49, no. 10, pp. 2415–2425, Oct. 2003.

[3] J. N. Laneman, D. N. C. Tse, and G. W. Wornell, “Cooperative diversity in wireless networks: efficient protocols and outage behavior,” *IEEE Transaction on Information Theory*, vol. 50, no. 12, pp. 3062–3080, Dec. 2004.

[4] T. Wang and L. Vandendorpe, “Iterative resource allocation for maximizing weighted sum min-rate in downlink cellular OFDMA systems,” *IEEE Transactions on Signal Processing*, vol. 59, no. 1, pp. 223–234, Jan. 2011.

[5] Y. Jang, E. Jeong, and Y. H. Lee, “A two-step approach to power allocation for OFDM signals over two-way amplify-and-forward relay,” *IEEE Transactions on Signal Processing*, vol. 58, no. 4, pp. 2426–2430, Apr. 2010.

[6] T. T. Pham, H. H. Nguyen, and H. D. Tuan, “Power allocation in orthogonal wireless relay networks with partial channel state information,” *IEEE Transactions on Signal Processing*, vol. 58, no. 2, pp. 869–878, Feb. 2010.

[7] W. Dang, M. Tao, H. Mu *et al.*, “Subcarrier-pair based resource allocation for cooperative multi-relay OFDM systems,” *IEEE Transactions on Wireless Communications*, vol. 9, no. 5, pp. 1640–1649, May 2010.

[8] O. Duval, Z. Hasan, E. Hossain *et al.*, “Subcarrier selection and power allocation for amplify-and-forward relaying over OFDM links,” *IEEE Transactions on Wireless Communications*, vol. 9, no. 4, pp. 1293–1297, Apr. 2010.

[9] W. Nam, W. Chang, S.-Y. Chung *et al.*, “Transmit optimization for relay-based cellular OFDMA systems,” in *IEEE International Conference on Communications*, 2007, pp. 5714 –5719.

[10] M. Kaneko and P. Popovski, “Radio resource allocation algorithm for relay-aided cellular OFDMA system,” in *IEEE International Conference on Communications*, 2007, pp. 4831 –4836.

[11] R. Kwak and J. Cioffi, “Resource-allocation for OFDMA multi-hop relaying downlink systems,” in *IEEE Global Telecommunications Conference*, 2007, pp. 3225 –3229.

[12] T. C.-Y. Ng and W. Yu, “Joint optimization of relay strategies and resource allocations in cooperative cellular networks,” *IEEE Journal on Selected Areas in Communications*, vol. 25, no. 2, pp. 328 –339, Feb. 2007.

[13] Y. Cui, V. K. N. Lau, and R. Wang, “Distributive subband allocation, power and rate control for relay-assisted OFDMA cellular system with imperfect system state knowledge,” *IEEE Transactions on Wireless Communications*, vol. 8, no. 10, pp. 5096–5102, Oct. 2009.

[14] M. Salem, A. Adinoyi, M. Rahman *et al.*, “Fairness-aware radio resource management in downlink OFDMA cellular relay networks,” *IEEE Transactions on Wireless Communications*, vol. 9, no. 5, pp. 1628 –1639, May 2010.

[15] B. Gui and L. J. Cimini-Jr, “Bit loading algorithms for cooperative OFDM systems,” *Eurasip Journal on Wireless Communications and Networking*, 2008.

[16] Y. Li, W. Wang, J. Kong *et al.*, “Power allocation and subcarrier pairing in OFDM-based relaying networks,” in *IEEE International Conference on Communications*, 2008, pp. 2602–2606.

[17] L. Vandendorpe, R. Duran, J. Louveaux *et al.*, “Power allocation for OFDM transmission with DF relaying,” in *IEEE International Conference on Communications*, 2008, pp. 3795 –3800.

[18] L. Vandendorpe, J. Louveaux, O. Oguz *et al.*, “Improved OFDM transmission with DF relaying and power allocation for a sum power constraint,” in *ISWPC*, 2008, pp. 665–669.

[19] ——, “Power allocation for improved DF relayed OFDM transmission: the individual power constraint case,” in *IEEE International Conference on Communications*, 2009, pp. 1–6.

[20] ——, “Rate-optimized power allocation for DF-relayed OFDM transmission under sum and individual power constraints,” *Eurasip Journal on Wireless Communications and Networking*, vol. 2009.

[21] ——, “Rate-optimized power allocation for OFDM transmission with multiple DF/regenerative relays and an improved protocol,” in *IEEE Wireless Communications and Networking Conference*, 2009, pp. 1–6.

[22] K. Vardhe, D. Reynolds, and B. D. Woerner, “Joint power alllocation and relay selection for multiuer cooperative communications,” *IEEE Transactions on Wireless Communications*, vol. 9, no. 4, pp. 1255–1260, Apr. 2010.

[23] W. Yu and R. Lui, “Dual methods for nonconvex spectrum optimization of multicarrier systems,” *IEEE Transactions on Communications*, vol. 54, no. 7, pp. 1310–1322, Jul. 2006.

[24] D. Tse and P. Viswanath, *Fundamentals of Wireless Communication*. Cambridge University Press, 2005.

[25] S. Boyd and L. Vandenberghe, *Convex optimization*. Cambridge University Press, 2004.

[26] D. P. Bertsekas, *Nonlinear programming, 2nd edition*. Athena Scientific, 2003.

Tao Wang received respectively B.E. (*summa cum laude*) and DoE degree in electronic engineering from Zhejiang University, China, in 2001 and 2006, as well as civil electrical engineering degree (*summa cum laude*) from Université Catholique de Louvain (UCL), Belgium, in 2008. He had multiple research appointments in Motorola Electronics Ltd. Suzhou Branch, China, since 2000 to 2001, the Institute for Infocomm Research (I^2R), Singapore, since 2004 to 2005, and Delft University of Technology and Holst Center in the Netherlands since 2008 to 2009. He is with UCL since 2009. He has been an associate editor-in-chief for *Signal Processing: An International Journal (SPIJ)* since Oct. 2010. His current research interests are in the optimization of wireless localization systems with energy awareness, as well as resource allocation algorithms in wireless communication systems.

Luc Vandendorpe was born in Mouscron, Belgium in 1962. He received the Electrical Engineering degree (*summa cum laude*) and the Ph. D. degree from the Universit Catholique de Louvain (UCL) Louvain-la-Neuve, Belgium in 1985 and 1991 respectively. Since 1985, he is with the Communications and Remote Sensing Laboratory of UCL where he first worked in the field of bit rate reduction techniques for video coding. In 1992, he was a Visiting Scientist and Research Fellow at the Telecommunications and Traffic Control Systems Group of the Delft Technical University, The Netherlands, where he worked on Spread Spectrum Techniques for Personal Communications Systems. From October 1992 to August 1997, L. Vandendorpe was Senior Research Associate of the Belgian NSF at UCL, and invited assistant professor. Presently he is Professor and head of the Institute for Information and Communication Technologies, Electronics and Applied Mathematics.

His current interest is in digital communication systems and more precisely resource allocation for OFDM(A) based multicell systems, MIMO and distributed MIMO, sensor networks, turbo-based communications systems, physical layer security and UWB based positioning. In 1990, he was co-recipient of the Biennal Alcatel-Bell Award from the Belgian NSF for a contribution in the field of image coding. In 2000 he was co-recipient (with J. Louveaux and F. Deryck) of the Biennal Siemens Award from the Belgian NSF for a contribution about filter bank based multicarrier transmission. In 2004 he was co-winner (with J. Czyz) of the Face Authentication Competition, FAC 2004. L. Vandendorpe is or has been TPC member for numerous IEEE conferences (VTC Fall, Globecom Communications Theory Symposium, SPAWC, ICC) and for the Turbo Symposium. He was co-technical chair (with P. Duhamel) for IEEE ICASSP 2006. He was an editor of the IEEE Trans. on Communications for Synchronisation and Equalization between 2000 and 2002, associate editor of the IEEE Trans. on Wireless Communications between 2003 and 2005, and associate editor of the IEEE Trans. on Signal Processing between 2004 and 2006. He was chair of the IEEE Benelux joint chapter on Communications and Vehicular Technology between 1999 and 2003. He was an elected member of the Signal Processing for Communications committee between 2000 and 2005, and an elected member of the Sensor Array and Multichannel Signal Processing committee of the Signal Processing Society between 2006 and 2008. Currently, he is an elected member of the Signal Processing for Communications committee. He is the Editor in Chief for the Eurasip Journal on Wireless Communications and Networking. He is a Fellow of the IEEE.